













## Accessories Catalogue 2017










## Contents

	Chain saws and pruners	6	
	Brushcutters	22	
	Protective clothing	44	
	Lubricant and sundry accessories	62	
	Technical assistance	72	

## Symbols

	<b>Power Sharp</b> Practical system that enables the chain to be sharpened in just 5 seconds without the use of tools. Simply attach the sharpening stone device onto the guide bar and operate the chain saw at maximum speed, pressing hard against the device for several seconds.
	<b>Premium Safety</b> A complete line of protective work clothing. Ensures maximum safety without restricting movement.
	<b>Original accessories and spare parts</b> Quality mark identifying original Emak parts and accessories. Designed to the most stringent quality standards, these items guarantee smoother operation of the machine and longer service life.

## Accessories range

The accessories range is offered as an extension and completion of the product range. Ergonomics, quality and styling are essential ingredients of the development of **Oleo-Mac**'s products: primarily designed to meet the needs of professionals whilst also taking care of the requirements of less expert users who insist on the very best. A truly comprehensive range of superb quality products at highly competitive prices – that's the **Oleo-Mac** formula.



Speed & Go




Load & Go





## The new accessories

<b>Brushcutters</b>	
Speed&Go head	26
Load&Go head	27
Multiline Pro Head	29
<b>Protective clothing</b>	
Professional chain-resistant gloves	58
Chain resistant forestry boots	59

A person wearing a full-body protective suit, including a helmet with a face shield and gloves, is using a chainsaw to cut into the trunk of a large tree in a forest. The person is positioned on the left side of the frame, facing right. The tree trunk is on the right side of the frame. The background is a dense forest with green foliage and some brown leaves on the ground. The text is overlaid on the right side of the image, partially obscuring the tree trunk.

Tough, safe and  
easy to use:  
feel like a true  
professional,  
every day,  
in every situation.

# Chain saws and pruners

## HOME



Battery-powered chainsaw for home use



**GS 220 Li-ion \***

Electric chainsaw



**GS 200 E**

Universal chain saws for home use



**GS 35 C**

**GS 350 C**

Universal chain saws for intensive home use



**937**

**GS 370**



**941 C**

**GS 410 C**



**941 CX**

**GS 410 CX**

## COUNTRYSIDE



Chain saws for intensive use



**GS 44**

**GS 440**



**947**



**952**

**GS 520**

## WOODLAND



Professional chain saws



**956**



**962**



**GS 650**



**GS 720**

## PRUNING



Professional pruning chain saws



**GST 250**



**GST 360**

Professional pruner



**PPX 271**

### Frequency of use Power source



occasional



battery



regular



mains
















intensive



petrol









\* refer to the Battery-powered products section

## Accessories for chain saws and pruners - Description of guide bars

					
		Bar	Bar type	Nose	Bar length
		Microlite®	Laminated	Sprocket	10" - 12" - 16" - 18" / 25 - 30 - 41 - 46 cm
		Laminated with Sprocket nose	Laminated	Sprocket	12" - 14" - 16" - 18" - 20" / 30 - 35 - 41 - 46 - 51 cm
		Solid with Replaceable Sprocket Nose. (Power Match®) Nose	Solid	Replaceable Sprocket Nose	15" - 16" - 18" - 20" - 22" - 24" - 25" - 28" / 38 - 41 - 46 - 51 - 56 - 61 - 64 - 71 cm
		Solid with Stellite Nose	Solid	Stellite	10" - 18" - 20" - 24" - 25" - 28" - 30" / 25 - 46 - 51 - 61 - 64 - 71 - 76 cm
		Solid with Stellite Nose	Solid	Stellite	30" - 36" / 76 - 91 cm
		Power Sharp	Laminated	Sprocket	16" / 41 cm



# Accessories for chain saws and pruners - Description of guide bars

														
Pitch	Gauge							Electric chainsaws	Petrol chainsaws					
	.043" 1.1 mm	.050" 1.3 mm	.058" 1.5 mm	.063" 1.6 mm					< 35 cc	35 - 45 cc	45 - 60 cc	> 60 cc		
.3/8"	●				●			●	●					
.325"		●			●	●			●	●	●			
.3/8"		●			●	●			●	●	●			
.325"			●		●		●			●	●	●	●	
.3/8"			●				●					●	●	●
.325"			●				●					●	●	●
.1/4"		●				●			●					
.3/8"			●				●						●	●
.404"				●			●							●
.3/8"		●			●				●	●	●			



## Accessories for chain saws and pruners – Key to guide bars



**D Microlite® bars and chains.** Ensure greater efficiency, enhanced cutting safety, lower weight and vibration, and improved lubrication.



Thanks to their reduced thickness and low engine power absorption, **Micro-Lite bars** are ideal for all types of DIY applications. These guide-bars ensure the maximum lightweight, low vibration, and reduced kickback.



**D Laminated sprocket-nose bars**



**Laminated sprocket nose bars**, designed for DIY and semi-professional use, are ideal for lightweight, versatile, and highly reliable chain saws. Equipped with a special barrier dam that prevents the loss of oil, these guide-bars ensure perfect lubrication, top performance, and longer working life of both bar and chain.



**D Solid bars (Power Match®) with replaceable sprocket nose and oiling system (Lubrijet®).**



**Solid guide-bars with a replaceable sprocket nose**, designed for professional applications, are equipped with an efficient oiling system (Lubrijet®) thanks to an angled hole on the bar that is kept clear by the transit of the chain drive links. The replaceable nose is available for .325" and .3/8" pitch chains.

## Accessories for chain saws and pruners – Key to guide bars



**Red** Solid bars with stellite nose and oiling system (Lubrijet®).



**Solid bars with a stellite alloy nose**, for professional use, guarantee excellent performance and lifetime even in the most adverse conditions and when subjected to prolonged stress. The stellite bar nose offers the maximum wear resistance. The chains are equipped with an efficient oiling system (Lubrijet®) that features an angled hole on the bar that is kept clear by the transit of the chain drive links.



**Blue** Solid bars with a stellite nose.



**Solid bars with a stellite alloy nose**, for professional use, guarantee excellent performance and a long working lifetime even in the most adverse conditions and when subjected to prolonged stress. The stellite bar nose offers the maximum wear resistance.



**Yellow** Power Sharp bars.





























































### Power Sharp

Practical system consisting of a sharpening stone, guide bar and a special chain that can be sharpened in just 5 seconds without the use of tools. Simply attach the sharpening stone device onto the guide bar and operate the chain saw at maximum speed, pressing the foot of the device hard against a solid object for several seconds. At this point the chain is sharpened and the operator can resume work immediately.






Available as standard on the **937** Power Sharp – **GS 370** Power Sharp version.







## Accessories for chain saws and pruners – Description of chains

								
	Chain type	Pitch	Tooth design	Gauge				Bar length
				.043" 1.1 mm	.050" 1.3 mm	.058" 1.5 mm	.063" 1.6 mm	
	Micro Chisel	1/4			E650MC-K			up to 16" (40 cm)
	Semi Chisel	3/8 LOW PRO		N143C-K				from 12" to 16" (from 30 to 40 cm)
	Semi Chisel	3/8 LOW PRO			N150C-N			
	Semi Chisel	3/8 LOW PRO			N150C-K			
	Semi Chisel	.325			K250C-N			from 11" to 20" (from 28 to 50 cm)
	Semi Chisel	.325			K250C-K			
	Semi Chisel	.325				K258C-N		
	Semi Chisel	.325				K258C-K		
	Semi Chisel	.325					K263C-N	
	Semi Chisel	.325			K250NK-K			from 13" to 18" (from 33 to 45 cm)
	Chisel	.325			K250L-N	K258L-N	K263L-N	from 11" to 20" (from 28 to 50 cm)
	Semi Chisel	3/8			A350EP-N			up to 36" (up to 90 cm)
	Semi Chisel	3/8				A358EP-N		
	Semi Chisel	3/8					A363EP-N	
	Pro-Chisel	3/8				A358EP-K		from 13" to 24" (from 33 to 60 cm)
	Pro-Chisel	3/8				A358LM-N		
	Pro-Chisel	3/8					A363LM-N	
	Semi Chisel	404					B463EP-N	

HOW TO IDENTIFY A CHAIN														
	K		50		C		K		072		EOM			
														
	.325"		.050"		Semi-Chisel		Anti-kickback tooth		#		Loop boxes, reels			
	Pitch		Gauge		Tooth type		Anti-kickback protection		N° links reel length					
	A	3/8"	50	.050" (1.3 mm)	C	Semi-Chisel	K						EOM	
	B	.404	58	.058" (1.5 mm)	EP	Type "E" professional (Semi-Chisel)	N						EEF	
	E	1/4"	63	.063" (1.6 mm)	LM	Magna Chisel (PRO-CHISEL)								
	K	.325"	43	.043" (1.1 mm)	MC	Micro Chisel								
	N	3/8" Lo Pro			NK	Narrow Kerf							REM	









































# Accessories for chain saws and pruners – Description of chains

										
			Electric chainsaws	Petrol chainsaws						Description
				< 35 cc	35 - 45 cc		45 - 60 cc		> 60 cc	
●	●		●	●	●				Recommended for small and medium displacement chainsaws. Clean cut, high performance. Installed on pruner chainsaws.	
●			●	●	●				Compact, lightweight and strong. The bar-chain combination offers a weight reduction of around 15% compared to a traditional chain.	
●	●		●	●	●				Maximum performance level. Ideal for intensive pruning work.	
●			●	●	●				Developed for DIY applications. Guarantees low vibration and maximum safety thanks to the anti-kickback tooth.	
	●	●			●	●	●	●	Lightweight and high performance. This chain was developed for professionals who need an .325" pitch chainsaw.	
	●	●			●	●	●		Developed for lightweight chainsaws, guarantees optimal performance and low power absorption.	
	●	●			●	●	●		Developed for professional users requiring an .325" pitch chainsaw.	
		●				●	●	●	Featuring high performance and strength, this chain is specifically designed for demanding professional applications.	
		●				●	●	●	The 3/8 chisel chain has always been the benchmark for professional users.	
		●						●	Designed to handle the heaviest duty applications. Unstoppable and super strong.	

Pitch	EMAK	OREGON	CARLTON	WINDSOR						
1/4	E650MC-K	25AP	E1MC-BL	50K	90°	30°	.025	85° - 90°	60°	5/32" - 4.0 mm
3/8 LP	N143C-K	90SG	N4C-BL	43RG	90°	35°	.025	85° - 90°	60°	5/32" - 4.0 mm
3/8 LP	N150C-N	91VXL	N1C	50R						
3/8 LP	N150C-K	91VG	N1C-BL	50RG						
.325	K250C-N/K	20BPX	K1C-K1C-BL	50J - 50JG	90°	30°	.025	80° - 90°	60°	3/16" - 4.8 mm
.325	K258C-N/K	21BPX	K2C-K2C-BL	58J - 58JG						
.325	K263C-N	22BPX	K3C	63J - 63JG						
.325	K250NK	95VPX	K1NK-BL	50JSG	80°	30°	.025	85° - 90°	60°	11/64" - 4.5 mm
.325	K250L-N	20LPX	K1L	50JL						
.325	K258L-N	21LPX	K2L	58JL						
.325	K263L-N	22LPX	K3L	63JL	90°	35°	.025	85° - 90°	60°	7/32" - 5.5 mm
3/8	A350EP-N	72D - 72DP	A1EP	50A						
3/8	A358EP-N	73D - 73DP	A2EP	58A						
3/8	A363EP-N	75D - 75DP	A3EP	63A	80°	30°	.025	80° - 90°	60°	7/32" - 5.5 mm
3/8	A358EP-K	73V	A2EP-GL							
3/8	A358LM-N	73LGX	A2LM	58APL						
3/8	A363LM-N	75LGX	A3LM	63APL						

## Accessories for chain saws and pruners – Guide-bars and chains















	Guide bars		Chains			Reels Emak 100"		Reels Emak 25"		Oleo-Mac new references		Machines															
	Length	Part code	Pitch x gauge	N. links Type	Part code	Type	Part code	N. links Type	Part code	Type	Part code	GS 220 Li-Ion	GS 250	GS 360	GS 35 C - GS 350 C	937 - GS 370 - 937 P.S. - GS 370 P.S.	941 C - GS 410 C	941 CX - GS 410 CX	GS 44 - GS 440	947 - 952 - GS 520	956	962	GS 650	GS 720	GS 200 E	EP 90 - EP 100 - EP 120 - PPX 271	
PS <div>Bar with sprocket nose</div>		16" - cm 41	5018 0029R	.3/8" x .050" (1.3mm)	56-91 PS	3063006										●	○										
		10" - cm 25	6309 0030R	.3/8" x .043" (1.1mm)	39-90 SG		N143C-K-100REM	3063037	N143C-K-025REM	3063023	N143C-K-039E	30629019															●
		10" - cm 25	5029 0032R	.1/4" x .050" (1.3mm)			E650MC-K-100REM	3063013	E650MC-K-025REM	3063029	E650MC-K-058E	30629040		●													
		12" - cm 30	5003 0232R	.3/8" x .050" (1.3mm)	45-91 VG						N150C-K-045E	30629013	●	●													
											N150C-N-045E	30629031	○	○													
		14" - cm 35	0935 00313R	.3/8" x .050" (1.3mm)	50-91 VG						N150C-K-050E	30629036															
											N150C-N-050E	30629032															
		14" - cm 35	5003 0190R	.3/8" x .050" (1.3mm)	52-91 VG		N150C-K-100REM	3063022	N150C-K-025REM	3063036	N150C-K-052E	30629015		●	●	○										○	
		14" - cm 35	5003 0190R	.3/8" x .050" (1.3mm)	53-91 VG		N150C-N-100REM	3063021	N150C-N-025REM	3063035	N150C-N-052E	30629033		○	○	○											
											N150C-K-053E	30629016			●												
											N150C-N-055E	30629034															
											N150C-K-056E	30629017															
											N150C-N-056E	30629035															
		16" - cm 41	5005 2012R	.3/8" x .050" (1.3mm)	57-91 VG						N150C-K-057E	30629018				● ● ●										●	
		16" - cm 41	0040 01108R	.3/8" x .050" (1.3mm)	57-91 VG						N150C-K-057E	30629018															
		16" - cm 41	5006 2006R	.325" x .050" (1.3mm)	66-95 VP		K250C-K-100REM	3063015	K250C-N-025REM	3063030	K250C-K-066E	30629004						● ●									
							K250C-N-100REM	3063014			K250C-K-072E	30629027						○ ○									
		18" - cm 46	5023 0058R	.325" x .050" (1.3mm)	72-95 VP														○								
																			●								
		16" - cm 41	0946 00275R	.325" x .058" (1.5mm)	66-21 BP	0010 00710R														●							
		18" - cm 46	0946 00285R	.325" x .058" (1.5mm)	72-21 BP						K258C-K-072E	30629007							●								
		20" - cm 51	5008 2021R*	.325" x .058" (1.5mm)	78-21 BP		K258C-N-100REM	3063017			K258C-K-078E	30629008								○ ○ ○							
		15" - cm 38	5001 2051*	.325" x .058" (1.5mm)	64-21 LP		K258L-N-100REM	3063019	K258C-N-025REM	3063032	K258C-K-064E	30629039								○ ○ ○							
		16" - cm 41	5001 2035R	.325" x .058" (1.5mm)	66-21 BP	0010 00710R	K258C-K-100REM	3063018													● ○						
		18" - cm 46	5001 2036R	.325" x .058" (1.5mm)	72-21 BP						K258C-K-072E	30629007								● ○							
		20" - cm 51	5001 2037R	.325" x .058" (1.5mm)	78-21 BP						K258C-K-078E	30629008								● ○							
		18" - cm 46	5009 2020R	.3/8" x .058" (1.5mm)	68-73 DP						A358EP-K-068E	30629001									○ ○						
		18" - cm 46	5002 2010R	.3/8" x .058" (1.5mm)	68-73 DP						A358EP-K-068E	30629001									○ ●						
		20" - cm 51	5002 2011R	.3/8" x .058" (1.5mm)	72-73 DP						A358EP-K-072E	30629002									○ ●						
											A358LM-N-072E	30629022*									○ ○						
		22" - cm 56	5002 2012*	.3/8" x .058" (1.5mm)	77-73 DP	0010 00754R*															○ ○						
		18" - cm 46	5025 0106R	.3/8" x .058" (1.5mm)	68-73 DP																						
		20" - cm 51	5025 0107R	.3/8" x .058" (1.5mm)	72-73 DP		A358EP-K-100REM	3063009	A358EP-N-025REM	3063024*	A358EP-K-072	30629002									●						
							A358EP-N-100REM	3063008	A358LM-N-025REM	3063025*	A358LM-N-072E	30629022*									○						
		24" - cm 61	5025 0108R	.3/8" x .058" (1.5mm)	84-73 DP		A358LM-N-100REM	3063010													●						
		28" - cm 71	5025 0109R	.3/8" x .058" (1.5mm)	92-73 DP																	○					
		18" - cm 46	0970 00244R*	.3/8" x .058" (1.5mm)	68-73 DP																				○		
		20" - cm 51	0970 00245R	.3/8" x .058" (1.5mm)	72-73 DP						A358EP-K-072E	30629002										●					
											A358LM-N-072E	30629022*													○		
		25" - cm 64	5002 2041R*	.3/8" x .058" (1.5mm)	88-73 DP						A358EP-K-088E	30629003										○					

(1) Non-European countries only. • Standard cutting systems. ° Compatible cutting systems. PS Power Sharp \* While stocks last

# Accessories for chain saws and pruners – Guide-bars and chains



	Guide bars		Chains			Reels Emak 100"		Reels Emak 25"		Oleo-Mac new references		Machines																		
	Length	Part code	Pitch x gauge	N. links Type	Part code	Type	Part code	N. links Type	Part code	Type	Part code	GS 220 Li-Ion	GS 250	GS 360	GS 35 C - GS 350 C	937 - GS 370 - 937 P.S. - GS 370 P.S.	941 C - GS 410 C	941 CX - GS 410 CX	GS 44 - GS 440	947 - 952 - GS 520	956	962	GS 650	GS 720	GS 200 E	EP 90 - EP 100 - EP 120 - PPV 271				
Bar with stellite nose	 10" - cm 25	5003 0352R	.1/4" x .050" (1.3mm)	60-25 AP		E650MC-K-100REM	3063013	E650MC-K-025REM	3063029	E650MC-K-060E	30629021	●																		
	 18" - cm 46	5002 2014*	.3/8" x .058" (1.5mm)	68-73 DP		A358EP-K-100REM A358EP-N-100REM A358LM-N-100REM	3063009 3063008 3063010	A358EP-N-025REM A358LM-N-025REM	3063024* 3063025*												○	○								
	 20" - cm 51	5002 2015R*	.3/8" x .058" (1.5mm)	72-73 DP											A358EP-K-072E	30629002								○	○					
	 24" - cm 61	5009 0039R*	.3/8" x .058" (1.5mm)	80-73 LP											A358LM-N-072E	30629022*								○	○					
	 20" - cm 51	5025 0111R	.3/8" x .058" (1.5mm)	72-73 DP											A358EP-K-072E	30629002										○				
	 24" - cm 61	5025 0112R	.3/8" x .058" (1.5mm)	84-73 DP											A358LM-N-072E	30629022*											○			
	 28" - cm 71	5025 0113R	.3/8" x .058" (1.5mm)	92-73 DP																							●			
	 30" - cm 76	5025 0110R*	.3/8" x .058" (1.5mm)	102-73 DP																							●			
	 18" - cm 46		.3/8" x .058" (1.5mm)	68-73 DP																						○				
	 20" - cm 51	0970 00247R*	.3/8" x .058" (1.5mm)	72-73 DP											A358EP-K-068E	30629001											○			
	 25" - cm 64	0970 00249R	.3/8" x .058" (1.5mm)	88-73 DP											A358EP-K-072E	30629002												●		
	 30" - cm 76	0980 00014R*	.3/8" x .058" (1.5mm)	98-73 DP											A358LM-N-072E	30629022*											○			
															A358EP-K-088E	30629003												●		
																												●		

(1) Non-European countries only. ● Standard cutting systems. ○ Compatible cutting systems. \* While stocks last

Supplementary chains	.325" x .063" (1.6mm)	67-22PBX		K263C-N-100REM	3063020	K263C-N-025REM	3063033*	K263C-N-067E	30629029
		74-22PBX						K263C-N-074E	30629030
	.325" x .063" (1.6mm)					K263L-N-025REM	3063034*		
		66-75LGX		A363LM-N-100REM	3063012	A363LM-N-025REM	3063027*	A363LM-N-066E	30629025*
	.3/8" x .063" (1.6mm)	72-75LGX						A363LM-N-072E	30629026*
		66-75D-DP		A363EP-N-100REM	3063011	A363EP-N-025REM		A363EP-N-066E	30629023
	.3/8" x .063" (1.6mm)	72-75D-DP							
	.3/8" x .050" (1.3mm)								
		72D-DP		A350EP-N-100REM	3063007				

## Accessories for chain saws and pruners - Discontinued



Bars		Chains			Reels				Reels	Machines																												
Length	Part code	Pitch x gauge	No. links	Part code	Type	Emak 100” reels		Emak 25” reels		Oleo-Mac new references	E 140 F - E 160 F	E 170	E 300 F	OM 15 E - OM 1500 E	OM 17 E - OM 19 E	OM 1800 E - OM 2000 E	GS 180 E	925 - GS 260	925 - GS 260 - 932 CK	935 DX	938	936 - 940 - 932 C	940 C	GS 35 - GS 350	GS 936	GS 940	941	942 - 946 - 951	350 - 261 GS - 264 - 481 - 482	965 HD	971	981	GS 820	985 HD	999 F	PP 250 - 270 - PPX 250 -270		
10" - cm 25	5016 0098R	.3/8" x .050" (1.3mm)	40		91 VG	N150C-K-100REM	3063022	N150C-K-025REM	3063036	N150C-K-040E	30629012							o																				
						N150C-N-100REM	3063021	N150C-N-025REM	3063035									o																				
10" - cm 25	5003 0352R	.1/4" x .050" (1.3mm)	60		25 AP	E650MC-K-100REM	3063013	E650MC-K-025REM	3063029	E650MC-K-060E	30629021							o																			o	
10" - cm 25	6309 0030R	.3/8" x .043" (1.1mm)	39		90 SG	N143C-K-100REM	3063037	N143C-K-025REM	3063023	N143C-K-039E	30629019																											o
12" - cm 30	6309 0054	.3/8" x .043" (1.1mm)	45	5101 0052R	90 SG	N143C-K-100REM	3063037	N143C-K-025REM	3063023				o																									
14" - cm 35	5101 2045	.3/8" x .043" (1.1mm)	50		90 SG	N143C-K-100REM	3063037	N143C-K-025REM	3063023	N143C-K-050E	30629020		o																									
14" - cm 35	0935 00313R	.3/8" x .050" (1.3mm)	50		91 VG	N150C-K-100REM	3063022	N150C-K-025REM	3063036	N150C-K-050E	30629036			o	o																							
14" - cm 35	0935 00313R	.3/8" x .050" (1.3mm)	50		91 VG	N150C-N-100REM	3063021	N150C-N-025REM	3063035	N150C-N-050E	30629032				o																							
16" - cm 41	0040 01108R	.3/8" x .050" (1.3mm)	57		91 VG	N150C-K-100REM	3063022	N150C-K-025REM	3063036	N150C-K-057E	30629018			o	o																							
12" - cm 30	0935 00323	.3/8" x .050" (1.3mm)	44	0010 00698R	91 VG														o																			
12" - cm 30	5003 0232R	.3/8" x .050" (1.3mm)	45		91 VG	N150C-K-100REM	3063022	N150C-K-025REM	3063036	N150C-K-045E	30629013										o																	
14" - cm 35	0935 00313R	.3/8" x .050" (1.3mm)	49	0010 00699R	91 VG							o							o																			
14" - cm 35	5003 0190R	.3/8" x .050" (1.3mm)	52		91 VG	N150C-K-100REM	3063022	N150C-K-025REM	3063036	N150C-K-052E	30629015				o						o			o														
14" - cm 35	5003 0190R	.3/8" x .050" (1.3mm)	53		91 VG	N150C-K-100REM	3063022	N150C-K-025REM	3063036	N150C-K-053E	30629016												o															
16" - cm 41	0040 01108R	.3/8" x .050" (1.3mm)	56		91 VG					N150C-K-056E	30629017	o							o																			
16" - cm 41	5005 2012R	.3/8" x .050" (1.3mm)	57		91 VG	N150C-K-100REM	3063022	N150C-K-025REM	3063036	N150C-K-057E	30629018				o						o		o	o	o													
13" - cm 33		.325" x .050" (1.3mm)	56	0010 00671R	95 VP	K258L-N-100REM	3063019															o																
16" - cm 41	5006 2006R	.325" x .050" (1.3mm)	66		95 VP																		o															
15" - cm 38	5001 2051	.325" x .050" (1.3mm)	64	0010 00676R	95 VP														o																			
16" - cm 41		.325" x .050" (1.3mm)	66		95 VP															o																		
16" - cm 41	0946 00275R	.325" x .058" (1.5mm)	66	0010 00609R	21 LP																															o		
18" - cm 46	0946 00285R	.325" x .058" (1.5mm)	72		21 LP					K258L-N -072E	30629011																									o		
16" - cm 41	0062 00892	.3/8" x .058" (1.5mm)	60		73 DP								o																							o		
18" - cm 46	0062 00893	.3/8" x .058" (1.5mm)	68		73 DP	A358EP-K-100REM	3063009			A358EP-K-068E	30629001		o																							o		
20" - cm 51	0062 00894	.3/8" x .058" (1.5mm)	72		73 DP	A358EP-N-100REM	3063008	A358EP-N-025REM	3063024	A358LM-N-072E	30629022		o																							o		
20" - cm 51 *	0062 00909	.3/8" x .058" (1.5mm)	72		73 DP	A358EP-N-100REM	3063008	A358EP-N-025REM	3063024	A358LM-N-072E	30629022																									o		
30" - cm 76 *	0081 01059	.3/8" x .058" (1.5mm)	98		73 DP	A358EP-N-100REM	3063008	A358EP-N-025REM	3063024																											o		
18" - cm 46	5009 2020R	.3/8" x .058" (1.5mm)	68-73 DP																																	o		
18" - cm 46	5002 2010R	.3/8" x .058" (1.5mm)	68-73 DP																																	o		
20" - cm 51	5002 2011R	.3/8" x .058" (1.5mm)	72-73 DP							A358EP-K-072E	30629002																									o		
22" - cm 56	5002 2012	.3/8" x .058" (1.5mm)	77-73 DP	0010 00754R	73DPL	A358EP-N-100REM	3063009	A358EP-N-025REM	3063024	A358LM-N-072E	30629022																									o		
					73DXL	A358EP-N-100REM	3063008	A358LM-N-025REM	3063025																											o		
25" - cm 64	5002 2041R	.3/8" x .058" (1.5mm)	88-73 DP		73LPL	A358LM-N-100REM	3063009																													o		
18" - cm 46	5002 2014	.3/8" x .058" (1.5mm)	68-73 DP							A358EP-K-088E	30629003																									o		
20" - cm 51	5002 2015R	.3/8" x .058" (1.5mm)	72-73 DP																																	o		
24" - cm 61	5009 0039R	.3/8" x .058" (1.5mm)	80-73 LP																																	o		
18" - cm 46	0970 00244R	.3/8" x .058" (1.5mm)	68		73 DP	A358EP-N-100REM	3063008	A358EP-N-025REM	3063024	A358EP-K-068E	30629001																									o o o		
20" - cm 51	0970 00245R	.3/8" x .058" (1.5mm)	72		73 DP	A358EP-N-100REM	3063008	A358EP-N-025REM	3063024	A358LM-N-072E	30629022																									o o o		
22" - cm 56		.3/8" x .058" (1.5mm)	77	0010 00754R	73 DP	A358EP-N-100REM	3063008	A358EP-N-025REM	3063024																											o o		
24" - cm 61		.3/8" x .058" (1.5mm)	84		73 DP	A358EP-N-100REM	3063008	A358EP-N-025REM	3063024																											o o		
18" - cm 46 *		.3/8" x .058" (1.5mm)	72		73 DP	A358EP-N-100REM	3063008	A358EP-N-025REM	3063024	A358EP-K-072E	30629002																									o o		
20" - cm 51 *	0970 00247R	.3/8" x .058" (1.5mm)	72		73 DP	A358EP-N-100REM	3063008	A358EP-N-025REM	3063024	A358LM-N-072E	30629022																									o o o		
23" - cm 58 *	0970 00248R	.3/8" x .058" (1.5mm)	80		73 DP	A358EP-N-100REM	3063008	A358EP-N-025REM	3063024																											o o		
25" - cm 64 *	0970 00249R	.3/8" x .058" (1.5mm)	88		73 DP	A358EP-N-100REM	3063008	A358EP-N-025REM	3063024	A358EP-K-088E	30629003																									o o		
30" - cm 76 *	0980 00014R	.3/8" x .058" (1.5mm)	98		73 DP	A358EP-N-100REM	3063008	A358EP-N-025REM	3063024																											o o		
30" - cm 76 *	0999 00557R	.404" x .063" (1.6mm)	92																																	o		
36" - cm 91 *	0999 00558	.404" x .063" (1.6mm)	108		59ACL	B463EP-N-100REM	3063028																												o			

# Accessories for chain saws and pruners - Split link



Emak Reference reel type	Description	Emak Reference female split link - TS (25 pcs per package)	Blount Reference (25 pcs per package)	Emak Reference male split link - PSTS (25 pcs per package)	Blount Reference (25 pcs per package)	No. of standard links in each Emak reel
A350EP-N-100REM	3/8 050/058/063	3063200	43003	3063206	43012	(36PSTS,36TS)
A358EP-K-100REM	3/8 050/058/063					(36PSTS,36TS)
A358EP-N-025REM	3/8 050/058/063					(6PSTS,6TS)
A358EP-N-100REM	3/8 050/058/063					(36PSTS,36TS)
A358LM-N-025REM	3/8 050/058/063					(6PSTS,6TS)
A358LM-N-100REM	3/8 050/058/063					(36PSTS,36TS)
A363EP-N-025REM	3/8 050/058/063			3063207	43013	(6PSTS,6TS)
A363EP-N-100REM	3/8 050/058/063					(36PSTS,36TS)
A363LM-N-025REM	3/8 050/058/063					(6PSTS,6TS)
A363LM-N-100REM	3/8 050/058/063					(36PSTS,36TS)
B463EP-N-100REM	.404	3063201	43004	3063208	43015	(24 PSTS, 24 TS)
E650MC-K-025REM	1/4	3063202	43044	3063209	43045	(10 PSTS, 10 TS)
E650MC-K-100REM	1/4					(40 PSTS, 40 TS)
K250C-K-100REM	.325 050/058/063	3063203	43000	3063210	43008	(40TS,40PSTS)
K250C-N-025REM	.325 050/058/063					(6TS,6PSTS)
K250C-N-100REM	.325 050/058/063					(40TS,40PSTS)
K250L-N-100REM	.325 050/058/063					(40TS,40PSTS)
K258C-K-100REM	.325 050/058/063					(40TS,40PSTS)
K258C-N-025REM	.325 050/058/063					(6TS,6PSTS)
K258C-N-100REM	.325 050/058/063					(40TS,40PSTS)
K258L-N-100REM	.325 050/058/063					(40TS,40PSTS)
K263C-N-025REM	.325 050/058/063			3063212	43009	(6PSTS,6TS)
K263C-N-100REM	.325 050/058/063					(40TS,40PSTS)
K263L-N-025REM	.325 050/058/063					(6PSTS,6TS)
K250NK-K-100REM	.325 NK050	3063204	43039	3063211	43034	(NK) (40TS,40PSTS)
N143C-K-025REM	.3/8LP 0.43/ 050	3063205	43002PK	3063214	42993PK	(NK) (6PSTS, 6TS)
N143C-K-100REM	.3/8LP 0.43/ 050					(NK) (40TS,40PSTS)
N150C-K-025REM	.3/8LP 0.43/ 050			3063213	43011PK	(N1C) (6 PSTS, 6 TS)
N150C-K-100REM	.3/8LP 0.43/ 050					(40TS,40PSTS)
N150C-N-025REM	.3/8LP 0.43/ 050					(N1C) (6 PSTS, 6 TS)
N150C-N-100REM	.3/8LP 0.43/ 050					(40TS,40PSTS)

PSTS: male link  
TS: female link

## Sundry accessories for chain saws and pruners



### Shears, loppers and pruning saws range

The range of shears, loppers and pruning saws was developed to assure the maximum cutting quality and efficiency in pruning, trimming and cutting operations in orchards, olive groves, gardening and forestry applications. Special attention was paid to the ergonomics of the handles to guarantee the maximum comfort and practicality. The cutting tools are made of top quality materials using technological solutions designed to ensure exceptional durability and cutting quality.

#### COMFORT model

**COMFORT** is a professional pruning shear with a curved anvil. Thanks to the ergonomic handle and cutting head aligned with the branch, operator effort is minimal and wrist position is entirely natural. The curved anvil prevents the transmission of shock loads to the wrist, whilst also allowing branches to be restrained during the cut. The handle and lightweight aluminium alloy anvil are hot forged. This technical solution enables us to provide this product with a lifetime guarantee against the risk of breakage. High carbon steel with hot forged construction ensure long working life of the blade. This model is the lightest tool in its class, weighing in at just 215 g.

Cutting capacity: 25 mm

Suitable for all types of cutting: vines, fruit trees, olive trees, and general gardening duties.

Pack: carton (6 pcs)



COMFORT pruning shears

3063066

#### UNIVERSAL model

The **UNIVERSAL** model is a professional pruning shear with a curved anvil that prevents the transmission of shock loads to the wrist, whilst also allowing branches to be restrained during the cut. The ergonomic handle ensures the maximum comfort for left-handed or right-handed users. The handle and lightweight aluminium alloy anvil are hot forged. This technical solution enables us to provide this product with a lifetime guarantee against the risk of breakage. High carbon steel with hot forged construction ensure long working life of the blade. This model is the lightest tool in its class, weighing in at just 210 g.

Cutting capacity: 25 mm

Suitable for all types of cutting: grapevines, fruit trees, olive trees, and general gardening duties.

Pack: carton (6 pcs)



UNIVERSAL pruning shears

3063069

#### TR80 model

This lopper is a professional curved anvil model for gardening duties. The reinforced oval section handles are designed to withstand high cutting forces. The ergonomic hand-grips are made of non-toxic non-slip material. High carbon steel with hot forged construction ensure long working life of the blade. The lightweight aluminium alloy anvil is hot forged. This technical solution enables us to provide this product with a lifetime guarantee against the risk of breakage.

Length: 80 cm

Weight: 800 g

Cutting capacity: 40 mm

Suitable for all types of lopping duty: orchards, olive trees and gardening.

Pack: carton (4 pcs)



TR80 lopper

3063073

## Sundry accessories for chain saws and pruners

### TR80M model

Model **TR80M** is a professional anvil lopper, suitable for pruning all types of trees. The lever-assisted movement, with S-shaped tie-bar, allows branches of up to 45 mm in diameter to be cut with ease, reducing the force exerted by the operator and featuring anti-shock action. Thanks to its construction features, this lopper offers the ideal ratio between handles opening width and lopping capacity. The reinforced oval section handles are designed to withstand high cutting forces. The ergonomic hand-grips are made of non-toxic non-slip material. High carbon steel with hot forged construction ensure long working life of the blade and the S-shaped tie-bar (mounted on the bush). The lightweight aluminium alloy anvil is hot forged. This technical solution enables us to provide this product with a lifetime guarantee against the risk of breakage.

Length: 80 cm

Weight: 1050 g

Cutting capacity: 45 mm

Suitable for all types of lopping duty: orchards, olive trees, gardening and forestry.

Pack: carton (4 pcs)

TR80M lopper

3063076



### SRM18R model

Professional flexible folding pruning saw with straight 18 cm blade. Practical, easy to handle and safe thanks to the click-lock closing system and ergonomic rubber clad handle. To increase penetration in the branch the blade is made of high carbon steel with a hard chrome coating that also provides anti-corrosion performance. The clean and accurate cut leaves a smooth surface that helps to avoid any form of disease and promotes rapid healing of the cut branch. The teeth are ground on 3 planes and pulse hardened to create an extremely durable cutting edge. The special machining of the blade using the "surface flaring" technique facilitates penetration into the branch and greatly reduces friction.

Blade length: 18 cm

Weight: 210 g

Particularly suitable for pruning vines and for general gardening duties.

Pack: carton (10 pcs)

SRM18R pruning saw

3063063



### SRM30 model

The **SRM30** professional pruning saw has a straight 30 cm blade and is equipped with a sheath with adjustable buckle. The ergonomic rubber clad handle ensures a safe and comfortable grip. To increase penetration in the branch the blade is made of high carbon steel with a hard chrome coating that also provides anti-corrosion performance. The clean and accurate cut leaves a smooth surface that helps to avoid any form of disease and promotes rapid healing of the cut branch. The teeth are ground on 3 planes and pulse hardened to create an extremely durable cutting edge. The special machining of the blade using the "surface flaring" technique improves penetration into the branch and greatly reduces friction.

Blade length: 30 cm

Weight: 240 g

Particularly suitable for pruning vines and olive trees and for general gardening duties.

Pack: carton (10 pcs)

SRM30 pruning saw

3063067



### SRM35T4 model

The **SRM35T4** professional pruning saw features a 35 cm curved blade and 4 m telescopic pole. The saw has a double blade with the upper blade for cuts of up to 10 cm and the lower side to use as a stroke limiter. To increase penetration in the branch the blade is made of high carbon steel with a hard chrome coating that also provides anti-corrosion performance. The teeth are ground on 3 planes and pulse hardened for extended durability of the cutting edge. The telescopic pole handles are made of aluminium.

Blade length: 35 cm

Weight: 1500 g

Telescopic pole length: 250-450 cm

Specifically designed for pruning olive trees, general gardening and heavy duty pruning duties for tree surgeons.

Pack: carton (1 pcs)

SRM35T4 pruning saw

3063047

Telescopic pole

3063056




## Sundry accessories for chain saws and pruners



	Part number	Machines
		GS 220 Li-Ion OM 1800 E - GS 180 E OM 2000 E - GS 200 E GS 35 - GS 350 GS 35 C - GS 350 C 937 - GS 370 941 C - GS 410 C 941 CX - GS 410 CX GS 44 - GS 440 GS 940 947 952 - GS 520 956 962 GS 650 971 GS 720 981 GS 820 985 HD 985 HD 999 F 925 - GS 260 - GST 250 932 C - 932 CK - GST 360 PP 250 - PPX 250 PP 270 - PPX 270 - PPX 271


**Round bars**

Special files for sharpening chain cutting edges. Available with various diameters in accordance with the chain to be sharpened. All bars are 8"/200 mm in length. Packing: carton. Quantity per carton: 6. Minimum order: 1 carton.

	Ø 5/32" - 4.0 mm suitable for chain type 91VG, 91S, 90VG, 25AP, 91PL	0010 00605	○	○	○	○	○	○			○													○	○		
	Ø 11/64" - 4.5 mm suitable for chain type 90SG	0010 00606																								○	○
	Ø 3/16" - 4.8 mm suitable for chain type 20BP, 95VP, 21BP, 21LP	0010 00607							○	○		○	○	○	○												
	Ø 7/32" - 5.6 mm suitable for chain type 59AC, 73DX, 73LP, 73DP	0010 00608												○	○	○	○	○	○	○	○	○	○				
	Ø 13/64" - 5.2 mm suitable for chain type 59AC, 73DX, 73LP, 73DP as above, for significantly worn chains	0010 00592												○	○	○	○	○	○	○	○	○	○				


**Replaceable nose for bars**

Replaceable nose for Power Match® bars with replaceable sprocket nose. Available for .325" and .3/8" pitch chains.




	Pitch .3/8" gauge .058"	0010 00771												○	○	○	○	○	○	○	○	○					
---	-------------------------	------------	--	--	--	--	--	--	--	--	--	--	--	---	---	---	---	---	---	---	---	---	--	--	--	--	--

**Bar cover**

The bar cover is indispensable for operator safety and to prevent chain damage during transport.

	Length 25 cm	W000 139																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		</
---	--------------	----------	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	----

# Sundry accessories for chain saws and pruners

		Part number	Machines																											
			GS 220 Li-Ion	OM 1800 E - GS 180 E	OM 2000 E - GS 200 E	GS 35 - GS 350	GS 35 C - GS 350 C	937 - GS 370	941 C - GS 410 C	941 CX - GS 410 CX	GS 44 - GS 440	GS 940	947	952 - GS 520	956	962	GS 650	971	GS 720	981	GS 820	965 HD	985 HD	999 F	925 - GS 260 - GST 250	932 C - 932 CK - GST 360	PP 250 - PPX 250	PP 270 - PPX 270 - PPX 271		
<b>Snow guard for starter housing</b> Only for use at temperatures below -5°.																														
	Snow guard for starter housing	5002 0057R														○	○					○								
<b>Flat files</b> Files required for sharpening of the depth limiter and to keep it at the correct distance from the cutting edge. Packing: carton. Quantity per carton: 12. Minimum order: 1 carton.																														
	Length 6" - 150 mm	0010 00258	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○		
<b>Harness</b> Single harness designed for pruners.																														
	Single harness for pruners	4160 463AR																								○	○			

o compatible tools

Obstacles no problem,  
however big or small.  
Gardens, ditches,  
undergrowth...  
we have just the cut  
you want.

vedi prodotti  
pagina 28

# Brushcutters

## HOME



Grass

Battery-powered brushcutter for home use

**BC 200 Li-Ion \***

Electric trimmers

**TR 61 E**

**TR 91 E**

**TR 101 E**

SPARTA universal brushcutters for home use

**SPARTA 25 TR**  
**SPARTA 250 TR**

**SPARTA 250 S**

**SPARTA 25**  
**SPARTA 250 T**

Universal brushcutters for home use

**BC 220 S**

**BC 220 T**

**BC 240 S**

**BC 24 T**  
**BC 240 T**

Universal multi-purpose brushcutters for home use

**BC 240 D**

**BC 300 D**

## COUNTRYSIDE



Bushes

SPARTA brushcutters for intensive use

**SPARTA 380 S**  
**SPARTA 381 S**

**SPARTA 381 T**

**SPARTA 440 S**  
**SPARTA 441 S**

**SPARTA 441 T**

**SPARTA 441 BP**

Brushcutters for intensive use

**BC 270 S**

**BC 270 T**

**BC 300 S**

**BC 300 T**

Brushcutters with 4-stroke engine

**BC 360 4S**

**BC 360 4T**

## WOODLAND



Undergrowth/Scrub

Professional brushcutters

**BC 350 S**

**BC 350 T**

**BC 430 S**

**BC 430 TL**

**741**

**746 S**

**746 T**

**753 S**

**753 T**

**755 MASTER**

Professional backpack brushcutters

**BCF 430**

**446 BP ERGO**








**453 BP ERGO**

Frequency of use    Power source    Recommended application    Terrain type

occasional	battery	head	sloping
regular	mains	disk	
intensive	petrol		

## Brushcutter accessories



Heads	Tap&Go with 2 nylon lines				
					
Part number	<b>6001 2020A</b> Ø 105 mm, M8x1.25 left hand female shaft thread, anti-clockwise rotation	<b>6106 2023A</b> Ø 105 mm, M8x1.25 left hand female shaft thread, anti-clockwise rotation	<b>6302 9008A</b> Ø 105 mm, M8x1.25 left hand male shaft thread, anti-clockwise rotation	<b>6308 0011A</b> Ø 109 mm, M8x1.25 left hand female shaft thread, anti-clockwise rotation	<b>4199 040CR</b> Ø 130 mm, M8x1.25 left hand female shaft thread, anti-clockwise rotation
 				Reel and line <b>6308 0012R</b>	Reel and line <b>4199 045R</b>
line diameter	1.65 mm	2.00 mm	2.00 mm	1.60 mm	2.00 mm
TR 61 E	●			○	
TR 91 E	○			●	
TR 101 E					●
SPARTA 25 TR / SPARTA 250 TR		●			
SPARTA 25 S / SPARTA 250 S			○		
SPARTA 25 / SPARTA 250 T			○		
SPARTA 38 S / 380 S / 381 S					
SPARTA 38 / 380 T / 381 T					
SPARTA 44 S / 440 S / 441 S					
SPARTA 44 / 440 T / 441 T					
SPARTA 42 BP / 440 BP / 441 BP					
BC 22 S / BC 220 S					
BC 22 T / BC 220 T					
BC 24 S / BC 240 S					
BC 24 T / BC 240 T					
BC 270 S					
BC 270 T					
BC 300 S					
BC 300 T					
BC 240 D					
BC 300 D					
BC 350 S					
BC 350 T					
BC 431 S / BC 430 S					
BC 431 T / BC 430 TL					
741					
746 S					
746 T					
753 S					
753 T					
755 MASTER					
BCF 431 / BCF 430					
446 BP ERGO					
453 BP ERGO					
BC 360 4S					
BC 360 4T					
<b>DISCONTINUED MODELS</b>					
725 S / 725 T					
725 S ERGO					
725 T ERGO					
BC 280 S					
BC 280 T					
BC 320 S					
BC 320 T					
730 S					
730 T					
735 S					
735 T					
740 S					
740 T					
BC 380 S					
BC 380 T					
BC 420 S					
BC 420 T					
BCF 420					
BC 430 S					
BC 430 T / BC 430 TL					
BCF 430					
435 BP / 440 BP					
SPARTA 44 FE					

# Brushcutter accessories

Heads	Tap&Go with 2 nylon lines					
Part number	<b>6301 9021</b> Ø 130 mm, M8x1.25 left hand male shaft thread, anti-clockwise rotation	<b>6301 9019</b> Ø 130 mm, M10x1.25 left hand female shaft thread, anti-clockwise rotation	<b>6301 9015</b> Ø 130 mm, M8x1.25 left hand male shaft thread, anti-clockwise rotation	<b>6301 9017</b> Ø 130 mm, M10x1.25 left hand female shaft thread, anti-clockwise rotation	<b>6301 9008A</b> Ø 130 mm, with universal mount	<b>6111 2061A</b> Ø 160 mm, M10x1.25 left hand female shaft thread, anti-clockwise rotation
	Reel without line <b>4199 052</b>					Reel and line <b>6303 2003BR</b>
line diameter	2.40 mm	2.40 mm	3.00 mm	3.00 mm	2.40 mm	3.50 mm
TR 61 E						
TR 91 E						
TR 101 E						
SPARTA 25 TR / SPARTA 250 TR						
SPARTA 25 S / SPARTA 250 S	●				○	
SPARTA 25 / SPARTA 250 T	●				○	
SPARTA 38 S / 380 S / 381 S				○		
SPARTA 38 / 380 T / 381 T				○		
SPARTA 44 S / 440 S / 441 S				○		
SPARTA 44 / 440 T / 441 T				○	○	
SPARTA 42 BP / 440 BP / 441 BP				○	○	
BC 22 S / BC 220 S						
BC 22 T / BC 220 T						
BC 24 S / BC 240 S						
BC 24 T / BC 240 T						
BC 270 S		○			○	
BC 270 T		○			○	
BC 300 S		○			○	
BC 300 T		○			○	
BC 240 D		○			○	
BC 300 D		○			○	
BC 350 S				○	○	○
BC 350 T				○	○	○
BC 431 S / BC 430 S				○	○	○
BC 431 T / BC 430 TL				○	○	○
741				○	○	○
746 S				●	○	
746 T				●	○	○
753 S				○	○	
753 T				○	○	○
755 MASTER				○	○	●
BCF 431 / BCF 430				○	○	○
446 BP ERGO				●	○	
453 BP ERGO				○	○	
BC 360 4S		○			○	
BC 360 4T		○			○	
<b>DISCONTINUED MODELS</b>						
725 S / 725 T	●				○	
725 S ERGO		●			○	
725 T ERGO		●			○	
BC 280 S		○			○	
BC 280 T		○			○	
BC 320 S		○			○	
BC 320 T		○			○	
730 S	●				○	
730 T	●				○	
735 S	●		○		○	
735 T	●		○		○	
740 S	●		○		○	
740 T	●		○		○	
BC 380 S				○	○	○
BC 380 T				○	○	○
BC 420 S				○	○	○
BC 420 T				○	○	○
BCF 420				○	○	○
BC 430 S				○	○	○
BC 430 T / BC 430 TL				○	○	○
BCF 430				○	○	○
435 BP / 440 BP	●		●		○	
SPARTA 44 FE	○			●	○	

● standard equipment ○ compatible tools

## Brushcutter accessories



**Speed&Go:** the revolutionary system that allows you to refill with line in just **10 seconds** a world first, revolutionary in terms of convenience, speed and ease of filling: 5 times less than normal line heads.

- **Simple:** the head can be refilled using a ready-to-use pre-wound line disk featuring easy opening without using tools
- **Versatile:** thanks to the adapters kit the Speed&Go line head can be fitted to any brushcutter on the market
- **Effective:** constantly perfect cutting performance thanks to the innovative nylon line cross section and material
- **Compact:** 130 mm diameter, with low profile knob; each disk assures the maximum refill capacity in terms of line length
- **Strong:** moulded fibreglass reinforced copolymer body for exceptional impact strength and wear resistance, even in the most demanding conditions
- **Recommended:** for brushcutters from 20 to 40 cc

### The pack contains:

- Speed&Go head
- Line disk M (Ø 2.4 mm)
- Adapter M10x1.25 lh female thread

### Technical specifications:

- Speed&Go easy line refilling system
- Tap&Go line feed system
- Replaceable aluminium eyelets
- Replaceable low profile cap
- Fibreglass reinforced structure

## Just 10 seconds and 3 simple steps to refill

# 1



### Open with a click...

by pressing the two side tabs - with no need for tools.

# 2



### Insert the disk...

on the aluminium plate and feed the two line ends through the eyelets.

# 3






### Close!

by realigning the two halves and gently pressing them together **& GO...**

### The innovative disk type refilling system is available in 2 sizes:

- M: Ø 2.4 mm / .095" (7 m / 275" of line)
- L: Ø 3.0 mm / .118" (5.5 m / 216" of line)



	Head	Part code	Line		Refill	Part code
	Ø 130 mm	6313 9001	Ø 2.4 mm		3 pcs Ø 2.4 mm – M line	63040300
					10 pcs Ø 2.4 mm – M line	63040302
					3 pcs Ø 3.0 mm – L line	63040301
					10 pcs Ø 3.0 mm – L line	63040303

## Brushcutter accessories



# New **LOAD&GO**



The smart line head **twenty** seconds to refill,  
**zero** tools required, **zero** difficulties encountered.

The new **Load&Go** line head is just the way you wanted it: even easier to fill and with longer life thanks to the new more robust cap. Extra life available with the optional metal reinforced cap. The result of careful research into the needs of users worldwide. Practical, reliable, rugged. Easy to use and install, always ready for work, resistant to impact, wear and vibration. Can be refilled with a few simple gestures without even getting your hands dirty. Equipped with the **Tap&Go** line release system for uninterrupted working. Suitable for all types of brushcutter for both home and professional use.

The pack contains	Ø 110 mm	Ø 130 mm	Ø 130 mm	Technical specifications:
Load&Go head	•	•	•	- <b>Load&amp;Go</b> easy line refilling system
2.4 mm line	Greenline	Greenline	○	- <b>Tap&amp;Go</b> line feed system
3.0 mm line	-	Greenline	First	- Interchangeable reinforced aluminium eyelets
M10x1.25 adapter, 1h female thread	•	•	•	- Reinforced cap with hex socket*
Plastic knob	•	•	○	- Reinforced plastic body
Metal knob	-	○	•	

• standard equipment    ○ compatible tools

**Just 20 seconds and 3 simple steps to refill**

**1**



**Load....**

align the eyelets. Insert the line in the head through one eyelet and feed it out through the opposite one until obtaining two tails of identical length.



**2**



**&...**

turn the profiled knob counter-clockwise.



**3**



**Go!**

the head is now ready for use.



\* When line thickness and length call for more effort to rewind the line.

Insert the spark plug wrench into the corresponding hex socket.

Turn clockwise.

Ø 110 mm	Knob	Code	Line	Standard adapters	Minimum quantity	Engine
	Plastic	<b>6310 9002</b>	Ø 2.4 mm	M10x1.25 1h female thread	20	20 – 30 cc
<b>Spare parts available</b>						
	Knob	<b>6310 0007R</b>	-	-	5	
	Reel without line	<b>6310 0020R</b>	-	-	1	















Ø 130 mm	Knob	Code	Line	Standard adapters	Minimum quantity	Engine
	Plastic	<b>6312 9008</b>	Ø 2.4 mm + Ø 3.0 mm	M10x1.25 1h female thread	20	20 – 55 cc
	Metal	<b>6312 9015</b>	Ø 3.0 mm	M10x1.25 1h female thread	20	30 – 55 cc
<b>Spare parts available</b>						
	Knob	<b>6312 0007AR</b>	-	-	5	
	Reel without line	<b>6312 0020AR</b>	-	-	1	
	Reinforced knob	<b>6312 0030AR</b>	-	-	5	

## Brushcutter accessories



### Adapters kit for Speed&Go and Load&Go line heads

The case contains 110 adapters (11 for each type of insert, different in terms of drive pin characteristics and thread pitch). The compatibility table allows fast identification of the type of line head adapter required in accordance with the make and model of brushcutter, guaranteeing total compatibility with the majority of models produced by the various makers and present on the world market. Dealers can re-order the most popular part codes with a minimum quantity of 10 items.

	Adapters kit		Part code
	Complete kit of 11 adapters compatible with our competitors' models		6312 0021A
Spare parts available			
	Standard adapters	Part code	Minimum quantity
	M8x1,25LHF	6312 0046	10
	M10x1LHF	6312 0047	10
	M10x1,5LHF	6312 0050	10
	M12x1,25LHF	6312 0051	10
	M12x1,5LHF	6312 0052	10
	M10x1,25LHM	6312 0048	10
	M10x1,5LHM	6312 0049	10
	M7x1LHM	6312 0045	10
	3/8-24FLHF	6312 0054	10
	M12x1,75LHF	6312 0053	10
	M14x1,5LHF	6312 0055	10
Available without case in 10-piece kits:			
	M8x1,25LHM	6312 0042R	10
	M10x1,25LHF	6312 0041R	10



## The universal multiline head

**five** seconds to refill,  
**zero** tools required for the job,  
**zero** problems.

The **Multiline Pro Head** is practical, reliable, rugged, and easy to use. Designed to provide clean and efficient cutting of grass and brush, even in the most demanding conditions. Easy to use and install, always ready for work, resistant to impact, wear and vibration. Can be loaded with one finger: just press a button to insert the pre-cut lengths of wire, without tools and without even getting your hands dirty. Suitable for all types of brushcutters, whether for home use or professional applications; recommended for brushcutters of more than 30 cc.

### Available diameters:

Ø 130 mm, compatible with line from 2.4 to 4 mm with any section (round, four-lobed, square, star, etc.)

### The pack contains:


- Multiline Pro Head
- Set of 4 lengths of Platin-Cut line (Ø 3.5 mm)
- Metal flanges adapter kit

### Technical specifications:


- Easy line refilling system
- 2 - 4 lines manual regulating system
- Reinforced aluminium body
- Reinforced plastic body

## Just 5 seconds and 3 simple steps to refill


### 1



**Press the metal tabs**  
no need for tools.




### 2




**Insert the line**  
until it feeds out from the opposite side.


### 3



**Release the tab**  
to clamp the line.
























**When the line is depleted,**  
for maximum efficiency and less waste just reposition it by feeding it fully towards either end (photo 2).






	Head	Part code	Line
	Ø 130 mm	6311 9013	from Ø 2.4 to 4 mm

## Brushcutter accessories



Heads	Speed&Go		Load&Go with plastic cap, metal knob and rapid line refill system				Universal multi-line with 4 and 8 lines	
								
Part number	6313 9001		6310 9002	6312 9008	6312 9015		6311 9013	4180 961A
	Ø 130 mm, M10x1.25 left hand female shaft thread, anti-clockwise rotation		Ø 110 mm, M10x1.25 left hand female shaft thread, anti-clockwise rotation	Ø 130 mm, plastic knob, 1 left hand female shaft thread M10x1.25 insert, Ø 2.40 and 3.00 mm line, anti-clockwise rotation	Ø 130 mm, metal knob, 1 left hand female shaft thread M10x1.25 insert, Ø 3.00 mm line, anti-clockwise rotation		Ø 4.7"/120 mm, 4 lines Platin-Cut, 20-25.4 mm bore "Multiline Pro Head" in aluminium	Ø 5.2"/137 mm, 8 four-lobed lines, 20-25.4 mm bore plastic
								
	3 M refills 6304 0300	3 L refills 6304 0301	Reel without line 6310 0020R	Reel without line 6312 0020AR	Reel without line 6312 0020AR			
							Set of 50 lines, four-lobed section, 3.5 mm dia., length 300 mm 4180 966C	
	10 M refills 6304 0302	10 L refills 6304 0303	Plastic knob 6310 0007R	Plastic knob 6312 0007AR	Plastic knob 6312 0007AR			
								
				Optional metal knob 6312 0030AR	Standard metal knob 6312 0030AR			
line diameter	2.40 mm	3.00 mm	2.40 mm	2.40 mm	3.00 mm	3.00 mm	3.50 mm	3.00 mm
TR 61 E								
TR 91 E								
TR 101 E								
SPARTA 25 TR / SPARTA 250 TR								
SPARTA 25 S / SPARTA 250 S	○			○				
SPARTA 25 / SPARTA 250 T	○			○				
SPARTA 38 S / 380 S / 381 S	○	○			●	○	○	○
SPARTA 38 / 380 T / 381 T	○	○			●	○	○	○
SPARTA 44 S / 440 S / 441 S		○			●	○	○	○
SPARTA 44 / 440 T / 441 T		○			●	○	○	○
SPARTA 42 BP / 440 BP / 441 BP		○			●	○	○	○
BC 22 S / BC 220 S			●					
BC 22 T / BC 220 T			●					
BC 24 S / BC 240 S	○			●				
BC 24 T / BC 240 T	○			●				
BC 270 S	○		○	●				
BC 270 T	○		○	●				
BC 300 S	○		○	●				
BC 300 T	○		○	●			○	○
BC 240 D	○		●	○				
BC 300 D	○		○	●				
BC 350 S	○	○		○	●	○	○	○
BC 350 T	○	○		○	●	○	○	○
BC 431 S / BC 430 S		○		○	●	○	○	○
BC 431 T / BC 430 TL		○		○	●	○	○	○
741		○		○	●	○	○	○
746 S					●	○	○	○
746 T					●	○	○	○
753 S					●	○	○	○
753 T					●	○	○	○
755 MASTER					○	○	○	○
BCF 431 / BCF 430		○		○	●	○	○	○
446 BP ERGO					●	○	○	○
453 BP ERGO					●	○	○	○
BC 360 4S	○			●	○	○		
BC 360 4T	○			●	○	○		
DISCONTINUED MODELS								
725 S / 725 T	○			○				
725 S ERGO	○		○	○				
725 T ERGO	○		○	○				
BC 280 S	○		○	●				
BC 280 T	○		○	●				
BC 320 S	○		○	●				
BC 320 T	○		○	●				○
730 S	○			○			○	○
730 T	○			○			○	○
735 S	○	○		○	○	○	○	○
735 T	○	○		○	○	○	○	○
740 S		○		○	○	○	○	○
740 T		○		○	○	○	○	○
BC 380 S	○	○		○	●	○	○	○
BC 380 T	○	○		○	●	○	○	○
BC 420 S		○		○	○	○	○	○
BC 420 T		○		○	○	○	○	○
BCF 420		○			○	○	○	○
BC 430 S		○		○	●	○	○	○
BC 430 T / BC 430 TL		○		○	●	○	○	○
BCF 430		○		○	●	○	○	○
435 BP / 440 BP		○		○	○	○	○	○
SPARTA 44 FE		○			○	○	○	○






# Brushcutter accessories

Blades	Special steel blades for grass cutting		3-tooth blades in special steel		Fixed 3-tooth steel blade
					
Part number	4095 567AR	4095 675AR	4095 637AR	4095 638AR	4095 643
	Ø 10"/255 mm, thickness 1.6 mm, bore 25.4 mm	Ø 12"/305 mm, thickness 2.5 mm, bore 25.4 mm	Ø 9"/230 mm, thickness 1.4 mm, bore 25.4 mm	Ø 10"/255 mm, thickness 1.4 mm, bore 25.4 mm	Ø 10"/255 mm, thickness 1.4 mm, bore 25.4 mm
TR 61 E					
TR 91 E					
TR 101 E					
SPARTA 25 TR / SPARTA 250 TR					
SPARTA 25 S / SPARTA 250 S			○	○	
SPARTA 25 / SPARTA 250 T			○	○	
SPARTA 38 S / 380 S / 381 S					
SPARTA 38 / 380 T / 381 T					
SPARTA 44 S / 440 S / 441 S					
SPARTA 44 / 440 T / 441 T		○		○	○
SPARTA 42 BP / 440 BP / 441 BP	○			○	○
BC 22 S / BC 220 S					
BC 22 T / BC 220 T					
BC 24 S / BC 240 S					
BC 24 T / BC 240 T					
BC 270 S			○	○	
BC 270 T			○	○	
BC 300 S	○			○	○
BC 300 T	○			○	○
BC 240 D					
BC 300 D	○			○	○
BC 350 S	○			○	○
BC 350 T	○			○	○
BC 431 S / BC 430 S				○	○
BC 431 T / BC 430 TL		○		○	○
741		○		○	○
746 S		○		○	○
746 T		○		○	○
753 S		○		○	○
753 T		○		○	○
755 MASTER		○		○	○
BCF 431 / BCF 430		○		○	○
446 BP ERGO		○		○	○
453 BP ERGO		○		○	○
BC 360 4S	○			○	○
BC 360 4T	○			○	○
<b>DISCONTINUED MODELS</b>					
725 S / 725 T			○	○	
725 S ERGO			○	○	
725 T ERGO			○	○	
BC 280 S			○	○	
BC 280 T			○	○	
BC 320 S	○			○	○
BC 320 T	○			○	○
730 S				○	○
730 T				○	○
735 S				○	○
735 T				○	○
740 S	○			○	○
740 T		○		○	○
BC 380 S	○			○	○
BC 380 T	○			○	○
BC 420 S	○			○	○
BC 420 T		○		○	○
BCF 420		○		○	○
BC 430 S				○	○
BC 430 T / BC 430 TL		○		○	○
BCF 430		○		○	○
435 BP / 440 BP	○			○	○
SPARTA 44 FE		●		○	○






● standard equipment ○ compatible tools

## Brushcutter accessories








Blades	3-tooth blades in tempered steel		4-tooth blades in tempered steel		
					
Part number	4095 673BR	4095 674AR	4095 681R	4095 568AR	4095 563AR
	Ø 10"/255 mm, thickness 1.8 mm, bore 25.4 mm	Ø 12"/305 mm, thickness 2.4 mm, bore 25.4 mm	8"/200 mm dia., thickness 2 mm, bore 25.4 mm	Ø 9"/230 mm, thickness 1.4 mm, bore 25.4 mm	Ø 10"/255 mm, thickness 1.4 mm, bore 25.4 mm
TR 61 E					
TR 91 E					
TR 101 E					
SPARTA 25 TR / SPARTA 250 TR					
SPARTA 25 S / SPARTA 250 S	○	○	○	○	○
SPARTA 25 / SPARTA 250 T	●	○	○	○	○
SPARTA 38 S / 380 S / 381 S	○				
SPARTA 38 / 380 T / 381 T	●				
SPARTA 44 S / 440 S / 441 S	●				
SPARTA 44 / 440 T / 441 T	●	○			○
SPARTA 42 BP / 440 BP / 441 BP	●	○			○
BC 22 S / BC 220 S			○		
BC 22 T / BC 220 T			○		
BC 24 S / BC 240 S	●		○	○	○
BC 24 T / BC 240 T	●		○	○	○
BC 270 S	●	○		○	○
BC 270 T	●	○		○	○
BC 300 S	●	○		○	○
BC 300 T	●	○		○	○
BC 240 D	●				
BC 300 D	●	○		○	○
BC 350 S	●	○			○
BC 350 T	●	○			○
BC 431 S / BC 430 S	●	○			○
BC 431 T / BC 430 TL	●	○			○
741	●	○			○
746 S		○			○
746 T		○			○
753 S		○			○
753 T		○			○
755 MASTER		○			○
BCF 431 / BCF 430	●	○			○
446 BP ERGO	●	○			○
453 BP ERGO	●	○			○
BC 360 4S	●	○			○
BC 360 4T	●	○			○
<b>DISCONTINUED MODELS</b>					
725 S / 725 T	●	○	○	○	○
725 S ERGO	●	○	○	○	○
725 T ERGO	●	○	○	○	○
BC 280 S	●	○		○	○
BC 280 T	●	○		○	○
BC 320 S	●	○		○	○
BC 320 T	●	○		○	○
730 S	●	○		○	○
730 T	●	○		○	○
735 S	●	○			○
735 T	●	○			○
740 S	●	○			○
740 T	●	○			○
BC 380 S	●	○			○
BC 380 T	●	○			○
BC 420 S	●	○			○
BC 420 T	●	○			○
BCF 420	●	○			○
BC 430 S	●	○			○
BC 430 T / BC 430 TL	●	○			○
BCF 430	●	○			○
435 BP / 440 BP	●	○			○
SPARTA 44 FE	○	○			○

# Brushcutter accessories

Blades	8-tooth blades in tempered steel		22-tooth blades in tempered steel	60-tooth blades in tempered steel	
					
Part number	4095 565AR	4095 065AR	4095 666AR	4095 636AR	4095 635AR
	Ø 9"/230 mm, thickness 1.4 mm, bore 25.4 mm	Ø 10"/255 mm, thickness 1.4 mm, bore 25.4 mm	Ø 8"/200 mm, thickness 1.6 mm, bore 25.4 mm	Ø 9"/230 mm, thickness 1.4 mm, bore 25.4 mm	Ø 10"/255 mm, thickness 1.4 mm, bore 25.4 mm
TR 61 E					
TR 91 E					
TR 101 E					
SPARTA 25 TR / SPARTA 250 TR					
SPARTA 25 S / SPARTA 250 S	○				
SPARTA 25 / SPARTA 250 T	○				
SPARTA 38 S / 380 S / 381 S					
SPARTA 38 / 380 T / 381 T					
SPARTA 44 S / 440 S / 441 S					
SPARTA 44 / 440 T / 441 T	○	○	○		○
SPARTA 42 BP / 440 BP / 441 BP					○
BC 22 S / BC 220 S	○				
BC 22 T / BC 220 T	○				
BC 24 S / BC 240 S		○			
BC 24 T / BC 240 T		○			
BC 270 S	○				
BC 270 T	○				
BC 300 S	○	○			
BC 300 T	○	○			
BC 240 D					
BC 300 D	○	○			
BC 350 S	○	○			○
BC 350 T	○	○			○
BC 431 S / BC 430 S	○	○	○		○
BC 431 T / BC 430 TL	○	○	○		○
741	○	○	○		○
746 S		○	○		
746 T		○	○		
753 S		○	○		
753 T		○	○		
755 MASTER		○	○		
BCF 431 / BCF 430		○			
446 BP ERGO		○	○		
453 BP ERGO		○			
BC 360 4S	○	○			○
BC 360 4T	○	○			○
<b>DISCONTINUED MODELS</b>					
725 S / 725 T				○	
725 S ERGO				○	
725 T ERGO				○	
BC 280 S	○				
BC 280 T	○				
BC 320 S	○	○			
BC 320 T	○	○			
730 S				○	○
730 T				○	○
735 S					○
735 T					○
740 S					○
740 T					○
BC 380 S	○	○			○
BC 380 T	○	○			○
BC 420 S	○	○	○		○
BC 420 T	○	○	○		○
BCF 420		○			
BC 430 S	○	○	○		○
BC 430 T / BC 430 TL	○	○	○		○
BCF 430		○			
435 BP / 440 BP		○			○
SPARTA 44 FE	○	○	○		○

## Brushcutter accessories



Blades	80-tooth blades in tempered steel		3-tooth brush blades in tempered steel		Shredder blades with 2 curved teeth in special steel
					
Part number	4095 564AR	4095 066AR	4095 641AR	4095 665AR	4095 677AR
	Ø 9"/230 mm, thickness 1.4 mm, bore 25.4 mm	Ø 10"/255 mm, thickness 1.4 mm, bore 25.4 mm	Ø 10"/255 mm, thickness 3.0 mm, bore 25.4 mm	Ø 12"/305 mm, thickness 3.0 mm, bore 25.4 mm	Ø 12"/305 mm, thickness 3.0 mm, bore 25.4 mm
TR 61 E					
TR 91 E					
TR 101 E					
SPARTA 25 TR / SPARTA 250 TR					
SPARTA 25 S / SPARTA 250 S					
SPARTA 25 / SPARTA 250 T					
SPARTA 38 S / 380 S / 381 S					
SPARTA 38 / 380 T / 381 T					
SPARTA 44 S / 440 S / 441 S					
SPARTA 44 / 440 T / 441 T		○	○		
SPARTA 42 BP / 440 BP / 441 BP		○	○	○	
BC 22 S / BC 220 S					
BC 22 T / BC 220 T					
BC 24 S / BC 240 S					
BC 24 T / BC 240 T					
BC 270 S					
BC 270 T					
BC 300 S			○		
BC 300 T			○		
BC 240 D					
BC 300 D			○		
BC 350 S		○	○		
BC 350 T		○	○		
BC 431 S / BC 430 S		○	○		
BC 431 T / BC 430 TL		○	○	○	○
741		○	○	○	○
746 S		○	○	●	○
746 T		○	○	●	○
753 S		○	○	●	○
753 T		○	○	●	○
755 MASTER		○	○	●	
BCF 431 / BCF 430		○	○	○	○
446 BP ERGO		○	○	○	○
453 BP ERGO		○	○	○	○
BC 360 4S		○	○		
BC 360 4T		○	○		
<b>DISCONTINUED MODELS</b>					
725 S / 725 T	○				
725 S ERGO	○				
725 T ERGO	○				
BC 280 S					
BC 280 T					
BC 320 S			○		
BC 320 T			○		
730 S	○	○	○		
730 T	○	○	○		
735 S		○	○		
735 T		○	○		
740 S		○	○	○	
740 T		○	○	○	○
BC 380 S		○	○		
BC 380 T		○	○		
BC 420 S		○	○		
BC 420 T		○	○	○	○
BCF 420		○	○	○	○
BC 430 S		○	○		
BC 430 T / BC 430 TL		○	○	○	○
BCF 430		○	○	○	○
435 BP / 440 BP		○	○	○	
SPARTA 44 FE		○	○		

# Brushcutter accessories

Guards	Plastic guards								Metal guards	
Part number	6002 2007R	4198 115B	6106 2012	6137 0263	6110 2032BR	4161 507CR	6104 2011CR	6104 2036BR	4174 280	4174 279
	For 600 W electric trimmer	For 850 W/1000 W electric trimmer	For petrol engine trimmer SPARTA TR series	For BC 220/240 series brushcutters	For brushcutters 725 Ergo series	For brushcutters SPARTA series	For brushcutters series 38/46/53 cc	For brushcutters series 25/30/34/38 cc	Ø 200 metal guard for 22-tooth blade	Ø 255 metal guard for 60/80-tooth blade
TR 61 E	•									
TR 91 E		•								
TR 101 E		•								
SPARTA 25 TR / SPARTA 250 TR			•			•				
SPARTA 25 S / SPARTA 250 S						•				
SPARTA 25 / SPARTA 250 T						•				
SPARTA 38 S / 380 S / 381 S							○	•		
SPARTA 38 / 380 T / 381 T							○	•		
SPARTA 44 S / 440 S / 441 S							○	•		
SPARTA 44 / 440 T / 441 T							○	•		
SPARTA 42 BP / 440 BP / 441 BP								•		○
BC 22 S / BC 220 S				•						
BC 22 T / BC 220 T				•						
BC 24 S / BC 240 S				•						
BC 24 T / BC 240 T				•						
BC 270 S				○	•					
BC 270 T				○	•					
BC 300 S								•		
BC 300 T								•		
BC 240 D				•						
BC 300 D				•				•		
BC 350 S							•			○
BC 350 T							•			○
BC 431 S / BC 430 S							•		○	○
BC 431 T / BC 430 TL							•		○	○
741							•		○	○
746 S							•		○	○
746 T							•		○	○
753 S							•		○	○
753 T							•		○	○
755 MASTER							•		○	○
BCF 431 / BCF 430								•		○
446 BP ERGO								•		○
453 BP ERGO								•		○
BC 360 4S							•			○
BC 360 4T							•			○
<b>DISCONTINUED MODELS</b>										
725 S / 725 T								•		○
725 S ERGO				○	•					
725 T ERGO				○	•					
BC 280 S				○	•					
BC 280 T				○	•					
BC 320 S					•					
BC 320 T					•					
730 S								•		○
730 T								•		○
735 S								•		○
735 T								•		○
740 S								•		○
740 T							•			○
BC 380 S								•		○
BC 380 T								•		○
BC 420 S							•		○	○
BC 420 T							•		○	○
BCF 420								•		○
BC 430 S							•		○	○
BC 430 T / BC 430 TL							•		○	○
BCF 430								•		○
435 BP / 440 BP								•		○
SPARTA 44 FE								•		

• standard equipment    ○ compatible tools

# Brushcutter accessories



Harnesses	Single harness		Harness with cushion		Double harness		Professional harness
Part number	4160 463AR	6001 0143R	4179 164R	4179 172R	6120 0106R	6305 0018AR	6307 0003R
	with snap hook	without snap hook	with cushion	with "comfort" cushion	double	double with quick release	professional
TR 61 E		○					
TR 91 E		●					
TR 101 E	●	○					
SPARTA 25 TR / SPARTA 250 TR	○	○					
SPARTA 25 S / SPARTA 250 S	●	○					
SPARTA 25 / SPARTA 250 T	●		○	○	○	○	○
SPARTA 38 S / 380 S / 381 S	●						
SPARTA 38 / 380 T / 381 T					●		
SPARTA 44 S / 440 S / 441 S	●						
SPARTA 44 / 440 T / 441 T					●		
SPARTA 42 BP / 440 BP / 441 BP							
BC 22 S / BC 220 S	●						
BC 22 T / BC 220 T	●						
BC 24 S / BC 240 S	●						
BC 24 T / BC 240 T			●				
BC 270 S	●	○					
BC 270 T			●	○	○	○	○
BC 300 S	●	○					
BC 300 T			●	○	○	○	○
BC 240 D							
BC 300 D	●	○					
BC 350 S	●	○					
BC 350 T			○	○	○	○	●
BC 431 S / BC 430 S	●	○					
BC 431 T / BC 430 TL					○	○	●
741					●	○	○
746 S	●	○					
746 T							●
753 S	●	○					
753 T							●
755 MASTER							●
BCF 431 / BCF 430							
446 BP ERGO							
453 BP ERGO							
BC 360 4S	●	○	○	○			
BC 360 4T					○	●	○
<b>DISCONTINUED MODELS</b>							
725 S / 725 T	●	○	●				
725 S ERGO	●	○					
725 T ERGO			●	○		○	○
BC 280 S	●	○					
BC 280 T			●	○	○	○	○
BC 320 S	●	○					
BC 320 T			●	○	○	○	○
730 S	●	○					
730 T			●	○		○	○
735 S	●	○	○	○			
735 T						●	○
740 S	●	○					
740 T			○	○		●	○
BC 380 S	●	○					
BC 380 T					○	●	○
BC 420 S	●	○					
BC 420 T					○	●	○
BCF 420							
BC 430 S	●	○					
BC 430 T / BC 430 TL					○	○	●
BCF 430							
435 BP / 440 BP							
SPARTA 44 FE					●		

# Brushcutter accessories

Type	Standard line installed on head							Compatible line															
	Greenline round							Greenline square			First round				Titanium round		Platin-Cut serrated square				Saw-Blade Gold sawtooth		
dia. mm/inches	1.6 .065"	2.0 .080"	2.4 .095"	2.7 .106"	3.0 .119"	3.5 .139"	4.0 .157"	2.4 .095"	3.0 .119"	3.5 .139"	2.4 .095"	3.0 .119"	3.5 .139"	4.0 .157"	3.0 .119"	3.5 .139"	2.7 .106"	3.0 .119"	3.5 .139"	4.0 .157"	3.0 .119"	3.5 .139"	
TR 61 E	●																						
TR 91 E	●																						
TR 101 E		●																					
SPARTA 25 TR / SPARTA 250 TR		●																					
SPARTA 25 S / SPARTA 250 S			●					○				○											
SPARTA 25 / SPARTA 250 T			●					○				○											
SPARTA 38 S / 380 S / 381 S					●				○				○			○			○			○	
SPARTA 38 / 380 T / 381 T					●				○				○			○			○			○	
SPARTA 44 S / 440 S / 441 S					●				○	○			○	○		○	○		○	○		○	○
SPARTA 44 / 440 T / 441 T					●				○	○			○	○		○	○		○	○		○	○
SPARTA 42 BP / 440 BP / 441 BP					●				○				○			○			○			○	
BC 22 S / BC 220 S			●					○				○											
BC 22 T / BC 220 T			●					○				○											
BC 24 S / BC 240 S			●	○				○				○						○					
BC 24 T / BC 240 T			●	○				○				○						○					
BC 270 S			●	○				○				○						○					
BC 270 T			●	○				○				○						○					
BC 300 S			●	○				○				○						○					
BC 300 T			●	○				○				○						○					
BC 240 D			●	○				○				○						○					
BC 300 D			●	○				○				○						○					
BC 350 S				○	●			○	○			○						○					
BC 350 T				○	●			○	○			○						○					
BC 431 S / BC 430 S				○	●				○	○			○	○		○	○	○	○	○		○	○
BC 431 T / BC 430 TL				○	●				○	○			○	○		○	○	○	○	○		○	○
741				○	●				○	○			○	○		○	○	○	○	○		○	○
746 S				○	●		○		○	○			○	○	○	○	○	○	○	○	○	○	○
746 T				○	●		○		○	○			○	○	○	○	○	○	○	○	○	○	○
753 S				○	●		○		○	○			○	○	○	○	○	○	○	○	○	○	○
753 T				○	●		○		○	○			○	○	○	○	○	○	○	○	○	○	○
755 MASTER						●	○			○				○	○			○		○	○		○
BCF 431 / BCF 430				○	●				○	○			○	○		○	○	○	○	○		○	○
446 BP ERGO				○	●		○		○	○			○	○	○	○	○	○	○	○	○	○	○
453 BP ERGO				○	●		○		○	○			○	○	○	○	○	○	○	○	○	○	○
BC 360 4S			●	○				○				○						○					
BC 360 4T			●	○				○				○						○					
DISCONTINUED MODELS																							
725 S / 725 T			●	○				○				○						○					
725 S ERGO			●	○				○				○						○					
725 T ERGO			●	○				○				○						○					
BC 280 S			●	○				○				○						○					
BC 280 T			●	○				○				○						○					
BC 320 S			●	○				○				○						○					
BC 320 T			●	○				○				○						○					
730 S			●	○				○				○						○					
730 T			●	○				○				○						○					
735 S			●	○				○	○			○	○			○		○	○			○	
735 T			●	○				○	○			○	○			○		○	○			○	
740 S			●	○				○	○			○	○			○		○	○			○	
740 T			●	○				○	○			○	○			○		○	○			○	
BC 380 S					●				○				○			○		○	○			○	
BC 380 T					●				○				○			○		○	○			○	
BC 420 S					●				○				○			○		○	○			○	
BC 420 T					●				○				○			○		○	○			○	
BCF 420					●				○				○			○		○	○			○	
BC 430 S					●				○	○			○	○		○	○	○	○	○		○	○
BC 430 T / BC 430 TL					●				○	○			○	○		○	○	○	○	○		○	○
BCF 430					●				○	○			○	○		○	○	○	○	○		○	○
435 BP / 440 BP			●		○	●		○	○			○	○			○		○	○			○	
SPARTA 44 FE					●				○				○			○		○	○			○	

• standard equipment ○ compatible tools

## Brushcutter accessories



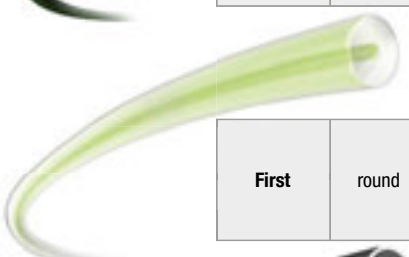
Line	Type	Diameter		Length (m)	Mini blister	Length (m)	Blister pack 1 lb-0.450 kg	Length (m)	Spool 4 lbs-1.8 kg	Length (m)	Spool 22 lbs-10 kg
		mm	inches		Code		Code		Code		Code



Greenline	round	1.6	.065"	15	6304 0224						
		2.0	.080"	15	6304 0225						
		2.4	.095"	15	6304 0226	87	6304 0104A	349	6304 0107A		
		2.7	.106"	15	6304 0182	72	6304 0181	280	6304 0240	1540	6304 2006
		3.0	.119"	15	6304 0227	56	6304 0105A	223	6304 0108A	1250	6304 2008
		3.5	.139"	15	6304 0228	41	6304 0174A	164	6304 0175A	920	6304 2001
		4.0	.157"			31	6304 0256				



Greenline	square	2.4	.095"	15	6304 0229	69	6304 0235				
		2.7	.106"	15	6304 0277	56	63040276	217	63040279	920	6304 2007
		3.0	.119"	15	6304 0278	44	6304 0206A	175	6304 0204A	720	6304 2009
		3.5	.139"			32	6304 0201A	129	6304 0273		



First	round	2.4	.095"	15	6304 0231	87	6304 0238				
		3.0	.119"	15	6304 0280	56	6304 0138A	223	6304 0271	1250	6304 2012
		3.5	.139"			41	6304 0140A	164	6304 0266		
		4.0	.157"			31	6304 0258	123	6304 0260		



Titanium	round	3.0	.119"			56	6304 0208A	168	6304 0212A*	1250	6304 2003
		3.5	.139"			41	6304 0209A	123	6304 0213A*	920	6304 2004



Platin-Cut	serrated square	2.7	.106"	15	6304 0234	57	6304 0242				
		3.0	.119"			44	6304 0244	175	6304 0246		
		3.5	.139"			32	6304 0249	128	6304 0252	780	6304 2002
		4.0	.157"			25	6304 0262	99	6304 0264		




Saw-Blade Gold	sawtooth	3.0	.119"			37	6304 0248A				
		3.5	.139"			27	6304 0254A	143	6304 0275		



Set of 50 lines for multi-line heads	square	3.5	.139"	0.3	4180 966C
--------------------------------------	--------	-----	-------	-----	-----------

\* Titanium packaging in rolls, weighs 3 lbs – 1.35 kg



### Recommended application

## Brushcutter accessories



### Greenline line

Top quality line made of high grade co-polymers that assure the maximum resistance to wear and breakage.



#### Available sizes:

- Round dia. 1.6 - 2 - 2.4 - 2.7 - 3 - 3.5 - 4 mm
- Square dia. 2.4 - 3 - 3.5 mm
- Set 50 dia. 3.5 mm square lines for multiline heads

#### Technical specifications:

- Sharp clean cutting action
- Ideal for grass, weeds and scrub
- Fast cutting speed

#### Recommended displacement



Type	Diameter		electric trimmers	22 cc	25 cc	30 cc	35 cc	40 cc	44 cc	more than 50 cc
	mm	inches								
	1.6	.065"	●	●						
	2.0	.080"	●	●	●					
	2.4	.095"		●	●	●	●			
	2.7	.106"			●	●	●	●	●	
	3.0	.119"					●	●	●	●
	3.5	.139"							●	●
	4.0	.157"							●	●
	2.4	.095"		●	●	●	●			
	3.0	.119"					●	●	●	●
	3.5	.139"							●	●

#### Recommended head



Type	Diameter		Tap&Go Ø 105	Tap&Go Ø 109	Tap&Go Ø 130-160	Load&Go Ø 110	Load&Go Ø 130	Multiline
	mm	inches						
	1.6	.065"	●	●				
	2.0	.080"	●	●	●	●		
	2.4	.095"		●	●	●	●	
	2.7	.106"			●	●	●	
	3.0	.119"			●	●	●	●
	3.5	.139"			●		●	●
	4.0	.157"			●		●	●
	2.4	.095"		●	●	●	●	
	3.0	.119"			●	●	●	●
	3.5	.139"			●	●	●	●

#### Recommended application

Type	Diameter						
	mm	inches					
	1.6	.065"	●				
	2.0	.080"	●				
	2.4	.095"	●				
	2.7	.106"	●	●			
	3.0	.119"	●	●	●		●
	3.5	.139"	●	●	●	●	●
	4.0	.157"	●	●	●	●	●
	2.4	.095"	●	●			
	3.0	.119"	●	●	●		●
	3.5	.139"	●	●	●	●	●

## Brushcutter accessories

### First line

Professional trimmer line composed of a blend of two materials that provide high flexibility for good breaking strength and optimal toughness for good abrasion resistance. More than 30% longer-lasting than conventional lines.

#### Available sizes:

- Round dia. 2.4 - 3 - 3.5 - 4 mm

#### Technical specifications:

- Ideal for grass, weeds, scrub and brushwood, even in the vicinity of stones and walls  
- Fast cutting speed

#### Recommended displacement

Type	Diameter		electric trimmers	22 cc	25 cc	30 cc	35 cc	40 cc	44 cc	more than 50 cc
	mm	inches								
	2.4	.095"		●	●	●	●			
	3.0	.119"					●	●	●	●
	3.5	.139"							●	●
	4.0	.157"							●	●

#### Recommended head

Type	Diameter		Tap&Go Ø 105	Tap&Go Ø 109	Tap&Go Ø 130-160	Load&Go Ø 110	Load&Go Ø 130	Multiline
	mm	inches						
	2.4	.095"		●	●	●	●	
	3.0	.119"			●	●	●	●
	3.5	.139"			●	●	●	●
	4.0	.157"			●		●	●

#### Recommended application

Type	Diameter						
	mm	inches					
	2.4	.095"	●	●			
	3.0	.119"	●	●	●		●
	3.5	.139"	●	●	●	●	●
	4.0	.157"	●	●	●	●	●

### Titanium Line

Developed specifically for professional use. The materials and production technology employed assure the maximum performance in terms of resistance to abrasion, breakage and sticking: the double layer cross-section combines two materials with different technical characteristics: the core assures exceptional breaking strength while the sheath has exceptional anti-wear properties.

#### Available sizes:

- Round Ø 3 - 3.5 mm

#### Technical specifications:

- Ideal for grass, weeds, scrub, brushwood and undergrowth, even in the vicinity of stones and walls  
- Fast cutting speed

#### Recommended displacement

Type	Diameter		electric trimmers	22 cc	25 cc	30 cc	35 cc	40 cc	44 cc	more than 50 cc
	mm	inches								
	3.0	.119"					●	●	●	●
	3.5	.139"							●	●

#### Recommended head

Type	Diameter		Tap&Go Ø 105	Tap&Go Ø 109	Tap&Go Ø 130-160	Load&Go Ø 110	Load&Go Ø 130	Multiline
	mm	inches						
	3.0	.119"			●	●	●	●
	3.5	.139"			●	●	●	●

#### Recommended application

Type	Diameter						
	mm	inches					
	3.0	.119"	●	●	●		
	3.5	.139"	●	●	●	●	●



## Brushcutter accessories

### Platin-Cut line

Line developed exclusively for **Oleo-Mac** with an innovative profile that ensures the maximum cutting performance and top-of-the-range durability of up to 40% longer than conventional lines. Professional double layer line: the core provides very high breakage resistance, while the outer sheath imparts very high wear resistance. Excellent weld resistance to temperatures of up to 280°C.



#### Available sizes:

- Serrated square dia. 2.7 - 3 - 3.5 - 4 mm





#### Technical specifications:

- Ideal for grass, weeds, scrub, brushwood and undergrowth, even in the vicinity of stones and walls
- Fast cutting speed







#### Recommended displacement

Type	Diameter		 electric trimmers	22 cc	25 cc	30 cc	35 cc	40 cc	44 cc	more than 50 cc
	mm	inches								
	2.7	.106"			●	●	●	●	●	
	3.0	.119"					●	●	●	●
	3.5	.139"							●	●
	4.0	.157"							●	●

#### Recommended head

Type	Diameter		 Tap&Go Ø 105	Tap&Go Ø 109	Tap&Go Ø 130-160	 Load&Go Ø 110	Load&Go Ø 130	 Multiline
	mm	inches						
	2.7	.106"			●	●	●	
	3.0	.119"			●	●	●	●
	3.5	.139"			●	●	●	●
	4.0	.157"			●		●	●

#### Recommended application

Type	Diameter		 Grass	 Weeds, scrub	 Brushwood, shrubs	 Undergrowth	 Pavements, car parks
	mm	inches					
	2.7	.106"	●	●	●		
	3.0	.119"	●	●	●		
	3.5	.139"	●	●	●		●
	4.0	.157"	●	●	●		●

## Brushcutter accessories

### Saw-Blade line Gold

Years of research have allowed **Oleo-Mac** to develop this innovative professional line offering the maximum flexibility and abrasion resistance. Exclusive reinforced sawtooth profile for the maximum cutting performance.

#### Available sizes:

- Sawtooth dia. 3 - 3.5 mm

#### Technical specifications:

- Sharp clean cutting action
- Ideal for scrub, brushwood and undergrowth with stem diameter of up to 12 mm
- Fast cutting speed
- Quieter than conventional line
- Safer and more practical than a normal steel blade



#### Recommended displacement



Type	Diameter		electric trimmers	22 cc	25 cc	30 cc	35 cc	40 cc	44 cc	more than 50 cc
	mm	inches								
	3.0	.119"					●	●	●	●
	3.5	.139"						●	●	●

#### Recommended head



Type	Diameter		Tap&Go Ø 105	Tap&Go Ø 109	Tap&Go Ø 130-160	Load&Go Ø 110	Load&Go Ø 130	Multiline
	mm	inches						
	3.0	.119"			●	●	●	●
	3.5	.139"			●		●	●

#### Recommended application

Type	Diameter						
	mm	inches					
	3.0	.119"	●	●	●	●	
	3.5	.139"	●	●	●	●	

Working calmly  
and efficiently:  
the peace of mind  
that comes  
from safety.





## Protective clothing

Size conversion chart

INTERNATIONAL	XS		S		M		L		XL		XXL		3XL	
ITALY	38	40	42	44	46	48	50	52	54	56	58	60	62	64
FRANCE	34	36	38	40	42	44	46	48	50	52	54	56	58	60
GERMANY	42	44	46	48	50	52	54	56	58	60	62	64	66	68
SPAIN	38	40	42	44	46	48	50	52	54	56	58	60	62	64
U.K.	24	26	28	30	32	34	36	38	40	42	44	46	48	50
U.S.A.	24	26	28	30	32	34	36	38	40	42	44	46	48	50

Lengths in centimetres for each size (chain-resistant jackets and trousers)












INTERNATIONAL		XS	S	M	L	XL	XXL	3XL
  <div> <div>T</div> <div>V</div> <div>C</div> <div>A</div> </div>	T	84-88	95-96	100-104	108-112	116-120	124-128	132-136
	A	152-182	152-183	152-184	152-185	164-194	164-195	164-196
	V	68-72	76-80	84-88	92-96	100-104	108-112	116-120
	C	78	80	82	84	86	86	86
	A	152-182	152-183	152-184	152-185	164-194	164-195	164-196



# Protective clothing









## Professional work jackets, trousers



Description	Material	Layers of fabric	Fabric toughness	Impermeability	Elasticated waist	Sizes	CE approval - Protection level - Class	Anti-cut protective zone
 <b>Tree Climbing Trousers</b>	94% polyamide cordura 6% elastham	5	Reinforced with 50% polyamide, 45% polyester, 5% elastham	Yes, with Sofiguard	Yes	42 44 46 48 50 52 Additional sizes on request	EN340 and EN 381-5: 1995 type A, Class 1, Category 2 PPE, resistant to chain speeds of up to 20 m/sec.	
 <b>Professional chain-resistant trousers</b>	94% cordura polyamide 6% elastham	5	Reinforced with 100% polyester	Yes, with Sofiguard	Yes	42 44 46 48 50 52 Additional sizes on request	EN340 and EN 381-5: 1995 type A, Class 1, Category 2 PPE, resistant to chain speeds of up to 20 m/sec.	
 <b>Universal comfort jacket</b>	46% polyester, 37% polyamide, 15% polyurethane, 2% elastham. 3D fabric, removable sleeves, 5 pockets.	-	Water-repellent, wind-proof, breathable fabric	Yes	-	S M L XL XXL Additional sizes on request	-	-
 <b>Jacket with anti-cut protection</b>	33% cotton 67% polyester	8	Hard-wearing shoulder reinforcement for transportation of logs etc.	Yes	Yes	S M L XL XXL Additional sizes on request	EN340 and EN 381-11: 2002, Class 1, PPE category 2, resistant to chain speeds of up to 20 m/sec.	
 <b>Professional work trousers with chain protection</b>	96% cordura polyamide 4% elastham	8	Reinforced with 50% polyamide, 45% polyester, 5% elastham	Yes	Yes	42 44 46 48 50 52 Additional sizes on request	EN340 and EN 381-5: 1995 type A, Class 1, Category 2 PPE, resistant to chain speeds of up to 20 m/sec.	
 <b>Professional brushcutter operator trousers</b>	33% cotton 67% polyester	-	Leg protection 30% cotton, 70% polyester	Yes	Yes	S M L XL XXL Additional sizes on request	EN340 Class 1, category 1 PPE	


## Semi-professional leggings, dungarees, trousers, oversleeves



Description	Material	Layers of fabric	Fabric toughness	Impermeability	Elasticated waist	Sizes	CE approval - Protection level - Class	Anti-cut protective zone
 <b>Leggings with anti-cut protection</b>	33% cotton 67% polyester	8	Waterproof lower leg to protect against humidity	Yes	Elasticated waist with attachment for quick fastening	One-size system	EN340 and EN 381-5: 1995 type A, Class 1, Category 2 PPE, resistant to chain speeds of up to 20 m/sec.	
 <b>Dungarees with anti-cut protection</b>	33% cotton 67% polyester	8	Waterproof lower leg to protect against humidity	Yes	Yes	S M L XL XXL Additional sizes on request	EN340 and EN 381-5: 1995 type A, Class 1, Category 2 PPE, resistant to chain speeds of up to 20 m/sec.	
 <b>Chain-resistant trousers</b>	33% cotton 67% polyester	8	Waterproof lower leg to protect against humidity	Yes	Yes	S M L XL XXL Additional sizes on request	EN340 and EN 381-5: 1995 type A, Class 1, Category 2 PPE, resistant to chain speeds of up to 20 m/sec.	
 <b>Oversleeves with anti-cut protection</b>	33% cotton 67% polyester	8	-	-	-	One-size system	Approved CE EN341-10 2002, Class 0, Category 2 PPE, resistant to chain speeds of up to 16 m/sec.	


## Professional gloves



Description	Material	Lined	Reinforcement	Closed cuff	Specifications	Sizes	CE approval - Protection level - Class	Protective zone
 <b>Professional chain-resistant gloves</b>	Stretch polyester fabric on back and Duratexture on palm	No	On back for enhanced wear resistance	Yes, elasticized with Velcro fastener	Palm with antivibration insert and fingers with comfort stitching and stretch fabric	S M L XL XXL	EN 388/03, EN 381-7/99, Class 1, Category 2 PPE, resistant to chain speeds of up to 20 m/sec.	Chain protection with high-strength fabric fitted exclusively to the back of the right-hand glove

## Semi-professional gloves







Description	Material	Lined	Reinforcement	Closed cuff	Specifications	Sizes	CE approval - Protection level - Class	Protective zone
 <b>Universal utility gloves</b>	Stretch polyester and natural leather	No	Leather reinforcements on palm and thumb	Elasticated cuff and Velcro wrist strap prevent penetration of debris	Comfort padding on palm	S M L XL XXL	EN 388/2003 / 3122 EN 420: 2003 - AM12009 PPE category 2	-

# Protective clothing


## Professional shoes and boots



Description	Material	Internal	Reinforcement	Footbed	Sole	Sizes	CE approval - Protection level - Class	Anti-cut protective zone
 Chain resistant forestry boots	Water-repellent leather upper	Breathable fabric lining	Ankle guard padding + 8-ply chain protection + steel toecap	Anatomic and washable	In anti-oil, antistatic, heat resistant non-slip nitrile rubber. High-strength fabric anti-piercing sole plate.	41 42 43 44 45	EN ISO 17249:2013, EN ISO 20345:2011, CL2 S3-CI-HI-HRO-SRC, Class 2, Category 2 PPE, resistant at chain speed of 24 m/sec.	
 Chain resistant forestry boots	Rubber outer	Breathable fabric lining (cotton sock)	Ankle guard reinforcement	In absorbent felt	In non-slip rubber with deep cleated tread	41 42 43 44 45	EN 345-1 1997, EN 345-2 1996 SB - E, Class 3, Category 2 PPE, resistant at chain speed of 28 m/sec. KWF certification	


## Professional helmets



Description	Material	Internal fittings	Sweat band	Ear defenders	Face shield	Sizes	CE approval - Protection level	Ventilation system
 Professional protective helmet	Shell in flexible ABS (shock absorbent).	Fabric harness with adjustable 4-point connection	Yes	SNR 26 dB adjustable	In nylon mesh	Universal	Helmet to EN 397 ANSI Z 87.1/1989 - Z 87 S. Ear defenders EN 352-3. Face shield EN 1731/S, EN 166	On the top


## Semi-professional helmets



Description	Material	Internal fittings	Sweat band	Ear defenders	Face shield	Sizes	CE approval - Protection level	Ventilation system
 Protective helmet	Shell in UV resistant polyethylene	Plastic harness with adjustable 4-point suspension	Yes	SNR 23 dB adjustable	In metal mesh	Universal	Helmet to EN 397 ANSI Z 87.1/1989 - Z 87 S. Ear defenders EN 352-3: 1997. Face shield to EN 1731/S, EN 166	On the top



## Professional ear defenders



Description	Material	Adjustable	Headband	SNR attenuation	Soundproofing system	Sizes	CE approval - Protection level
 Professional protective and noise-filtering ear defenders	Shell in ABS	Yes	In steel, plastic and foam	32 dB	PVC + foam	Universal	EN 352-1, Category 2 PPE




## Semi-professional ear defenders



Description	Material	Adjustable	Headband	SNR attenuation	Soundproofing system	Sizes	CE approval - Protection level
 Noise filtering ear defenders	Shell in ABS	Yes	In steel and plastic	30 dB	PVC + foam	Universal	EN 352-1, Category 2 PPE
 Noise filtering ear defenders	Shell in PVC	Yes	In plastic	27 dB	PVC + foam	Universal	EN 352-1, Category 2 PPE



## Semi-professional spectacles



Description	Material	Lenses	Nose pads	Optical class	Mechanical strength	Sizes	CE approval - Protection level
 Protective spectacles	Clear with direct ventilation	In antifogging polycarbonate	Soft silicone	1	Lens B - Frame F	Universal	EN 166
 Dark protective spectacles	Rigid plastic	Dark wrap-around, anti-scratch and anti-glare in sunlight	Soft silicone	1	Lens F - Frame F	Universal	EN 166
 Clear protective spectacles	Rigid plastic	Wrap-around, anti-scratch, clear	Plastic	1	Lens S - Frame S	Universal	EN 166



## Professional face shields



Description	Structure	Face shield	Brow band	Optical class	Mechanical strength	Sizes	CE approval - Protection level
 Super-professional mesh face shield	PVC	Metal mesh	Foam	-	-	Universal	EN 1731-S
 Super-professional polycarbonate face shield	PVC	Polycarbonate	Foam	1	B	Universal	EN 166

## Semi-professional face shields



Description	Structure	Face shield	Brow band	Optical class	Mechanical strength	Sizes	CE approval - Protection level
 "Plus" polycarbonate face shield	PVC	Polycarbonate	Foam	1	B	Universal	EN 166
 "Plus" mesh face shield	PVC	Metal mesh	Foam	-	-	Universal	EN 1731-F

# Tree climbing trousers




## Safety



EN 381-5: 1995 type A Class 1 (20 m/sec.)

Approval CE, standards EN340 and EN 381-5: 1995 type A, Class 1, Category 2 PPE, able to resist a chain speed of 20 m/sec.

## Anti-cut protection zone



180° front, 5 cm right inside leg, 5 cm left inside leg.



<b>Safety</b>	<ul style="list-style-type: none"> <li>• CE approval, standards EN340 and EN 381-5: 1995 type A, Class 1.</li> <li>• Category 2 PPE.</li> <li>• Anti-rip protection – RIPSTOP.</li> <li>• Special 5-layer anti-cut protection (softly).</li> </ul>
<b>Fit</b>	<ul style="list-style-type: none"> <li>• Protective anti-cut trousers specifically designed and produced for tree climbing. Extremely lightweight with breathable fabric. Slim fit thanks to the tri-elastic stretch fabric for the maximum comfort and exceptional freedom of movement.</li> </ul>
<b>Materials</b>	<ul style="list-style-type: none"> <li>• Waterproofed with SOFIGUARD treatment.</li> <li>• 94% polyamide, 6% elastham (CORDURA - RIPSTOP).</li> <li>• Black reinforcement: 50% polyamide, 45% polyester, 5% elastham.</li> </ul>
<b>Sizes</b>	<b>Code</b>
42	3155051
44	3155052
46	3155053
48	3155054
50	3155055
52	3155056
	Additional sizes on request
<b>Pack</b>	Cardboard box

## Practical



Anti-cut protection with “Softly” technology: 5 layers of high-tenacity anti-cut fabric, extremely lightweight and flexible to guarantee: safety, low weight, a comfortable fit and freedom of movement. The antibacterial treatment and fast drying performance help to banish odours while enhancing the sensation of freshness and comfort for the wearer.



LH leg pocket with zipper.



Spark plug wrench pocket on RH leg.



Large rear concealed zippers for a slim fit and the maximum comfort, also when worn in conjunction with boots.



Tri-elastic stretch fabric for a close fit and freedom of movement. Elasticized waistband with 2 press stud fastener system to ensure a perfect fit.



2 front pockets and back pocket with zipper, braces buttons, 2 attachment rings, 2 belt loops, dorsal loop.



Knee, crotch and rear in bi-elastic breathable fabric for the maximum freedom of movement and ventilation.

# Professional chain-resistant trousers



## Safety



EN 381-5: 1995 type A Class 1 (20 m/sec.)

Approval CE, standards EN340 and EN 381-5: 1995 type A, Class 1, Category 2 PPE, able to resist a chain speed of 20 m/sec.

## Anti-cut protection zone



180° front, 5 cm right inside leg, 5 cm left inside leg.



<b>Safety</b>	<ul style="list-style-type: none"> <li>• CE approval, standards EN340 and EN 381-5: 1995 type A, Class 1.</li> <li>• Category 2 PPE.</li> <li>• Anti-tear protection – RIPSTOP.</li> <li>• Special 5-layer anti-cut protection (sofly).</li> </ul>
<b>Fit</b>	<ul style="list-style-type: none"> <li>• Extremely lightweight and breathable comfort model anti-cut safety trousers with waterproof fabric and abrasion resistance in the areas most subject to wear. Excellent fit thanks to the use of bi-stretch fabric.</li> </ul>
<b>Materials</b>	<ul style="list-style-type: none"> <li>• Waterproofed with SOFIGUARD treatment.</li> <li>• 94% polyamide, 6% elastham (CORDURA - RIPSTOP).</li> <li>• Reinforced with 100% polyester.</li> </ul>

Sizes	Code
42	3155034
44	3155035
46	3155036
48	3155037
50	3155038
52	3155044
	One-size system. Additional sizes on request
<b>Pack</b>	Cardboard box

## Practical



Anti-cut protection with “Sofly” technology: 5 layers of high-tenacity anti-cut fabric, extremely lightweight and flexible to guarantee: safety, low weight, a comfortable fit and freedom of movement. The antibacterial treatment and fast drying performance help to banish odours while enhancing the sensation of freshness and comfort for the wearer.



Elasticated waistband, fastening with 2 press studs.



2 front pockets and back pocket with zipper, braces buttons, 2 attachment rings, 2 belt loops, dorsal loop.



Elasticated internally stitched spats with hook rivet for attachment to shoelaces.



LH leg pocket with zip.



Spark plug pocket on RH leg.



RIPSTOP anti-rip fabric with 100% polyester reinforcement in the areas most subject to wear.

# Universal comfort jacket



CORDURA

## Description

Ultra lightweight and breathable comfort jacket with large hi-vis orange coloured trims. Excellent fit thanks to the tri-stretch fabric.



### Safety

- Category 1 PPE.

### Visibility

- Large front and rear orange coloured trim for the maximum daytime and night-time visibility.

### Materials

- Water-repellent, wind-proof, breathable.
- 46% polyester, 37% polyamide, 15% polyurethane, 2% elastham.
- 3D fabric, removable sleeves, 5 pockets.

### Sizes

### Code

S

3155039

M

3155040

L

3155041

XL

3155042

XXL

3155043

Additional sizes on request

### Pack

Cardboard box

## Practical



Tri-elastic stretch fabric for an optimal fit.



Water-resistant and breathable fabric, aids temperature regulation and natural ventilation.



Zipper fastener with 2 sliders. 5 pockets with zip.



High wrap-around collar.



Adjustable cuffs with Velcro fastener.



Removable sleeves.

# Jacket with anti-cut protection



## Safety



EN 381-11 Class 1 (20 m/sec.)

CE approved, standards EN340 and EN 381-11: 2002, Class 1, Category 2 PPE, able to resist a chain speed of 20 m/sec.

## Anti-cut protection zone



Complete anti-cut protection for arms, shoulders and chest.



<b>Safety</b>	<ul style="list-style-type: none"> <li>• CE approval, standards EN340 and EN 381-11: 2002, Class 1.</li> <li>• Category 2 PPE.</li> <li>• Special 8-layer anti-cut protection (sofly).</li> </ul>
<b>Visibility</b>	<ul style="list-style-type: none"> <li>• Large orange coloured trim for the maximum daytime and night-time visibility.</li> </ul>
<b>Fit</b>	<ul style="list-style-type: none"> <li>• Extremely lightweight and breathable comfort model anti-cut safety jacket reinforced with waterproof fabric with abrasion resistance in the areas most subject to wear. Excellent fit thanks to the anti-cut fabric technology (sofly).</li> </ul>
<b>Materials</b>	<ul style="list-style-type: none"> <li>• Water-repellent.</li> <li>• 33% cotton, 67% polyester.</li> <li>• 240 g/m².</li> </ul>
<b>Sizes</b>	<b>Code</b>
<b>S</b>	<b>3155014A</b>
<b>M</b>	<b>3155001A</b>
<b>L</b>	<b>3155002A</b>
<b>XL</b>	<b>3155003A</b>
<b>XXL</b>	<b>3155004A</b>
	Additional sizes on request
<b>Pack</b>	Cardboard box

## Practical



Anti-cut protection with "Sofly" technology: 8 layers of high-tenacity anti-cut fabric, extremely lightweight and flexible to guarantee safety, low weight, a comfortable fit and freedom of movement. The antibacterial treatment and fast drying performance help to banish odours while enhancing the sensation of freshness and comfort for the wearer.



Hard-wearing shoulder reinforcement for transportation of logs etc.



High wrap-around adjustable jacket collar.



Zipper fastener. Front pockets with zipper.



Opening with zipper for under-arm ventilation.



Adjustable cuffs with Velcro.



Mobile phone pocket on the left sleeve.

## Professional chain-resistant trousers



CORDURA

## Safety



EN 381-5 Class 1 (20 m/sec.)

Approval CE, standards EN340 and EN 381-5: 1995 type A, Class 1, Category 2 PPE, able to resist a chain speed of 20 m/sec.

## Anti-cut protection zone



180° front, 5 cm right inside leg, 5 cm left inside leg.



<b>Safety</b>	<ul style="list-style-type: none"> <li>• CE approval, standards EN340 and EN 381-5: 1995 type A, Class 1.</li> <li>• Category 2 PPE.</li> <li>• Special 8-layer anti-cut protection.</li> </ul>
<b>Visibility</b>	<ul style="list-style-type: none"> <li>• Orange lower part.</li> <li>• 3 cm reflective band.</li> </ul>
<b>Materials</b>	<ul style="list-style-type: none"> <li>• Impermeable.</li> <li>• 96% cordura polyamide, 4% elastham.</li> <li>• Reinforced with 50% polyamide, 45% polyester, 5% elastham.</li> </ul>

Sizes	Code
42	001001563
44	001001564
46	001001565
48	001001566
50	001001567
52	001001568
	One-size system. Additional sizes on request
<b>Pack</b>	Cardboard box

## Practical



Elasticated waistband, fastening with 2 press studs.



2 front pockets and back pocket with zipper, braces buttons, 2 attachment rings, 2 belt loops, dorsal loop.



Zipper with 2 sliders.



LH leg pocket with Velcro closure.



Ruler pocket on RH leg.



Elasticated bottom hem.


# Professional brushcutter operator trousers



## Safety

Approval CE standards EN340, Class 1, Category 1 PPE.

## Protection zone



Front, Back, 180° front.



<b>Safety</b>	<ul style="list-style-type: none"> <li>• Approval CE EN340.</li> <li>• Class 1.</li> <li>• Category 1 PPE.</li> </ul>
<b>Visibility</b>	<ul style="list-style-type: none"> <li>• Orange coloured trims.</li> </ul>
<b>Materials</b>	<ul style="list-style-type: none"> <li>• Waterproofed fabric 33% cotton, 67% polyester.</li> <li>• High strength protection at the front of the leg.</li> <li>• Leg protection 30% cotton, 70% polyester.</li> </ul>
<b>Sizes</b>	<b>Code</b>
<b>S</b>	<b>3155019</b>
<b>M</b>	<b>3155020</b>
<b>L</b>	<b>3155021</b>
<b>XL</b>	<b>3155022</b>
<b>XXL</b>	<b>3155023</b>
	Additional sizes on request
<b>Pack</b>	Cardboard box

## Practical




Rear part and crotch in bi-stretch fabric for freedom of movement.



Elasticated waistband, fastening with 1 button.



2 front pockets, back pocket with Velcro fastener, braces buttons, belt loops, dorsal loop.



Zipper.



RH leg pocket with Velcro fastener.



Impermeable material, front high strength protection to protect the operator from debris.

# Leggings with anti-cut protection




## Safety



Class 1 (20 m/sec.)

Approval CE, standards EN340 and EN 381-5: 1995 type A, Class 1, Category 2 PPE, able to resist a chain speed of 20 m/sec.

## Anti-cut protection zone



180° front, 5 cm right inside leg, 5 cm left inside leg.



<b>Safety</b>	<ul style="list-style-type: none"> <li>• CE approval, standards EN340 and EN 381-5: 1995 type A, Class 1.</li> <li>• Category 2 PPE.</li> <li>• Special 8-layer anti-cut protection.</li> </ul>
<b>Visibility</b>	<ul style="list-style-type: none"> <li>• Orange abdominal part.</li> <li>• Detail of pocket.</li> </ul>
<b>Materials</b>	<ul style="list-style-type: none"> <li>• Breathable.</li> <li>• 33% cotton, 67% polyester.</li> <li>• 245 g/m².</li> </ul>
<b>Sizes</b>	<b>Code</b>
<b>Universal</b>	<b>001001359A</b>
	One-size system
<b>Pack</b>	Cardboard box

## Practical



Total opening on both legs over full height with 70 cm zipper.



Large orange coloured area to ensure maximum visibility, double belt loops.



Elasticated waist with attachment for quick fastening, adjustable belt.



Side pocket with Velcro fastener.



Waterproof lower leg to protect against humidity.



Large open rear area to leave access to back pockets.

# Dungarees with anti-cut protection




## Safety



Class 1 (20 m/sec.)

EN340 and EN 381-5: 1995 type A, Class 1, Category 2 PPE, able to resist a chain speed of 20 m/sec.

## Anti-cut protection zone



180° front, 5 cm right inside leg, 5 cm left inside leg.



<b>Safety</b>	<ul style="list-style-type: none"> <li>• CE approval, standards EN340 and EN 381-5: 1995 type A, Class 1, Category 2 PPE.</li> <li>• Special 8-layer anti-cut protection.</li> </ul>
<b>Visibility</b>	<ul style="list-style-type: none"> <li>• Orange coloured bib.</li> <li>• Detail of pockets.</li> </ul>
<b>Materials</b>	<ul style="list-style-type: none"> <li>• Breathable.</li> <li>• 33% cotton, 67% polyester, 245 g/m<sup>2</sup>.</li> <li>• Waterproofed bottom.</li> </ul>

Sizes	Code
S	001001370A
M	001000849B
L	001000850B
XL	001000851B
XXL	001000852B
	Additional sizes on request
<b>Pack</b>	Cardboard box

## Practical



Elasticated waistband.



2 side slit pockets, 3 buttons for side opening, belt loops.



Elasticated and adjustable braces.



Large pocket with Velcro fastener, large orange coloured area for maximum visibility.



Ruler pocket on RH leg.



Waterproof lower leg to protect against humidity.

## Chain-resistant trousers




## Safety



Class 1 (20 m/sec.)

Approval CE, standards EN340 and EN 381-5: 1995 type A, Class 1, Category 2 PPE, able to resist a chain speed of 20 m/sec.

## Anti-cut protection zone




180° front, 5 cm right inside leg, 5 cm left inside leg.



<b>Safety</b>	<ul style="list-style-type: none"> <li>• CE approval, standards EN340 and EN 381-5: 1995 type A, Class 1.</li> <li>• Category 2 PPE.</li> <li>• Special 8-layer anti-cut protection.</li> </ul>
<b>Visibility</b>	<ul style="list-style-type: none"> <li>• Orange abdominal part.</li> <li>• Detail of pocket.</li> </ul>
<b>Materials</b>	<ul style="list-style-type: none"> <li>• Breathable.</li> <li>• 33% cotton, 67% polyester.</li> <li>• 245 g/m².</li> </ul>
<b>Sizes</b>	<b>Code</b>
<b>S</b>	<b>001001368A*</b>
<b>M</b>	<b>001001147B*</b>
<b>L</b>	<b>001001148B*</b>
<b>XL</b>	<b>001001149B*</b>
<b>XXL</b>	<b>001001150B*</b>
	Additional sizes on request
<b>Pack</b>	Cardboard box

## Practical



Elasticated waist, closure with buttons, belt loops.



Pocket with Velcro fastener, braces buttons, 2 belt loops, 2 dorsal loops.



Zipper.



2 side slit pockets.



Ruler pocket on RH leg.



Waterproof lower leg to protect against humidity.

# Oversleeves with anti-cut protection



## Safety



Class 0 (16 m/sec.)

CE approval standard EN381-10 2002, Class 0, Category 2 PPE, able to resist a chain speed of 16 m/sec.

## Anti-cut protection zone



Front: right, left. Back: right, left.



### Visibility

- Orange coloured fabric.

### Materials

- Breathable.
- 33% cotton, 67% polyester.
- 245 g/m<sup>2</sup>.

### Sizes

### Code

### Universal

001001366

### Pack

Cardboard box

## Professional chain-resistant gloves



### Safety



Class 1 (20 m/sec.)

CE approval standards EN 388/03, EN 381-7/99, Category 2 PPE.

### Anti-cut protection zone

Chain protection on back of left glove.



#### Materials

- Stretch polyester fabric on back and Duratexture on palm.
- Fingers with comfort stitching and stretch fabric.
- Palm with antivibration insert.
- Elasticized cuff with Velcro fastener.
- Reinforcement on back for enhanced wear resistance.
- High-strength fabric chain protection.

#### Sizes

#### Code

S-8

3155072

M-9

3155073

L-10

3155074

XL-11

3155075

XXL-12

3155076

Pack

Pouch

### Practical



Fingers with comfort stitching and stretch fabric.



Palm with antivibration insert.



Elasticized cuff with Velcro fastener.

## Universal utility gloves



### Safety

CE marking, compliant with EN 420 2003 - AM1: 2009

EN 388: 2003 / 3122 and directive 89/686/EEC, category 2 PPE.

EN 388 Mechanical requirements, abrasion resistance 3, cut resistance 1, tear resistance 2, puncture resistance 2.



#### Materials

- Back in elasticized polyester and natural leather.
- Comfort padding on palm.
- Elasticated cuffs.
- Wrist strap with Velcro.
- High strength seams stitched with cotton faced nylon thread.

#### Sizes

#### Code

S-8

3155029

M-9

3155030

L-10

3155031

XL-11

3155032

XXL-12

3155033

Pack

Pouch

# Chain resistant forestry boots




## Safety



Class 2 (24 m/sec.)

EN ISO 17249:2013, EN ISO 20345:2011, CL2 S3-CI-HI-HRO-SRC, Class 2, Category 2 PPE, resistant at chain speed of 24 m/sec.

## Anti-cut protection zone



Rigid toecap.



### Materials

- Water-repellent leather upper.
- Lining in breathable nonwoven fabric.
- High-strength fabric anti-piercing sole plate.
- 8-ply chain protection from top of foot up to the shin and on the sides.

### Sizes

### Code

41	001000975C
42	001000976C
43	001000977C
44	001000978C
45	001000979C

### Pack

Cardboard box

## Practical



Protective steel toecap with rubberised leather rand for enhanced wear resistance.



Anti-oil, antistatic, non-slip nitrile rubber sole resistant to temperatures up to 300°C.



Washable anatomic footbed.

# Chain resistant forestry boots



## Safety



Class 3 (28 m/sec.)

CE approval standards EN 345-1 1997, EN 345-2 1996 SB - E, Class 3, Category 2 PPE, able to resist a chain speed of 28 m/sec. KWF certification.

## Anti-cut protection zone



Rigid toecap.



### Materials

- Outer in rubber with non-slip rubber sole with deep cleated tread.
- Breathable fabric lining and absorbent felt footbed.
- Protective steel toecap, anti-piercing sole plate and ankle guard.
- Chain protection on top of foot and on shin.

### Sizes

### Code

41	001001079A
42	001001080A
43	001001081A
44	001001082A
45	001001083A

### Pack

Cardboard box

## Helmets



### Professional protective helmet



<b>Safety</b>	<ul style="list-style-type: none"> <li>• Approved helmet to EN 397 ANSI Z 87.1/1989 - Z 87 S.</li> <li>• Approved ear defenders to EN 352-3.</li> <li>• Approved face shield to EN 1731/S, EN 166.</li> </ul>
<b>Materials</b>	<ul style="list-style-type: none"> <li>• Shell made of flexible, UV-resistant ABS (shock absorbent).</li> <li>• Fabric harness with double 4-point suspension (patented shock absorption system).</li> <li>• Sweatband and ratchet adjustment system.</li> <li>• SNR 26 dB adjustable ear defenders.</li> <li>• Face shield holder.</li> <li>• Mesh face shield.</li> </ul>
<b>Sizes</b>	<b>Code</b>
<b>Universal</b>	<b>001001283BR</b>
<b>Pack</b>	Cardboard box

Mesh face shield **3155018**.Nape cover **001001540R**. Optional.Ear defender kit for helmet **3155011**.

### Protective helmet



<b>Safety</b>	<ul style="list-style-type: none"> <li>• Approved helmet to EN 397 ANSI Z 87.1/1989 - Z 87 S.</li> <li>• Approved ear defenders to EN 352-3: 1997.</li> <li>• Approved face shield to EN 1731/S, EN 166.</li> </ul>
<b>Materials</b>	<ul style="list-style-type: none"> <li>• Shell in UV-resistant polyethylene.</li> <li>• Plastic harness with 4-point suspension.</li> <li>• Sweatband and manual adjustment system.</li> <li>• SNR 23 dB adjustable ear defenders.</li> <li>• Face shield holder.</li> <li>• Metal mesh face shield.</li> </ul>
<b>Sizes</b>	<b>Code</b>
<b>Universal</b>	<b>3155012</b>
<b>Pack</b>	Cardboard box



## Ear defenders



### Professional protective and noise-filtering ear defenders



<b>Safety</b>	<ul style="list-style-type: none"> <li>• EN 352-1 approved ear defenders.</li> <li>• Category 2 PPE.</li> </ul>
<b>Materials</b>	<ul style="list-style-type: none"> <li>• Shell made of UV-resistant ABS (shock absorbent).</li> <li>• Stainless steel headband.</li> <li>• Adjustable.</li> <li>• Attenuation (SNR): 32 dB.</li> <li>• PVC + foam sound insulation.</li> </ul>
<b>Sizes</b>	<b>Code</b>
<b>Universal</b>	<b>3155013R</b>
<b>Pack</b>	Cardboard box



### Noise filtering ear defenders



<b>Safety</b>	<ul style="list-style-type: none"> <li>• EN 352-1 approved ear defenders.</li> <li>• Category 2 PPE.</li> </ul>
<b>Materials</b>	<ul style="list-style-type: none"> <li>• Shell in ABS.</li> <li>• Plastic + stainless steel headband.</li> <li>• Adjustable.</li> <li>• Attenuation (SNR) 30 dB.</li> <li>• PVC + foam sound insulation.</li> </ul>
<b>Sizes</b>	<b>Code</b>
<b>Universal</b>	<b>001000835</b>
<b>Pack</b>	Pouch



### Noise filtering ear defenders



<b>Safety</b>	<ul style="list-style-type: none"> <li>• EN 352-1 approved ear defenders.</li> <li>• Category 2 PPE.</li> </ul>
<b>Materials</b>	<ul style="list-style-type: none"> <li>• Shell in PVC.</li> <li>• Plastic headband.</li> <li>• Adjustable.</li> <li>• Attenuation (SNR): 27 dB.</li> <li>• PVC + foam sound insulation.</li> </ul>
<b>Sizes</b>	<b>Code</b>
<b>Universal</b>	<b>4175114</b>
<b>Pack</b>	Pouch



## Protective spectacles

### Protective spectacles



<b>Safety</b>	<ul style="list-style-type: none"> <li>• EN 166 approved protective spectacles.</li> <li>• Optical class 1.</li> </ul>
<b>Materials</b>	<ul style="list-style-type: none"> <li>• Clear frame, polycarbonate lens, direct ventilation.</li> <li>• Mechanical strength: Lens B - Frame F.</li> </ul>
<b>Sizes</b>	<b>Code</b>
<b>Universal</b>	<b>3055016</b>
<b>Pack</b>	Pouch



### Dark protective spectacles



<b>Safety</b>	<ul style="list-style-type: none"> <li>• EN 166 approved protective spectacles.</li> <li>• Optical class 1.</li> </ul>
<b>Materials</b>	<ul style="list-style-type: none"> <li>• Wrap-around anti-scratch lens, dark, anti-glare in sunlight, soft silicone nose pads.</li> <li>• Mechanical strength: Lens FT - Frame FT.</li> </ul>
<b>Sizes</b>	<b>Code</b>
<b>Universal</b>	<b>3155026R</b>
<b>Pack</b>	Cardboard box



### Clear protective spectacles



<b>Safety</b>	<ul style="list-style-type: none"> <li>• EN 166 approved protective spectacles.</li> <li>• Optical class 1.</li> </ul>
<b>Materials</b>	<ul style="list-style-type: none"> <li>• Wrap-around clear anti-scratch lens, anti-glare in sunlight, flexible silicone temple arms.</li> <li>• Mechanical strength: Lens S - Frame S.</li> </ul>
<b>Sizes</b>	<b>Code</b>
<b>Universal</b>	<b>3155027R</b>
<b>Pack</b>	Cardboard box



## Face shields



### Super-professional mesh face shield



<b>Safety</b>	<ul style="list-style-type: none"> <li>• EN 1731-S approved.</li> </ul>
<b>Materials</b>	<ul style="list-style-type: none"> <li>• PVC structure, replaceable and adjustable metal mesh face shield.</li> <li>• Foam brow band.</li> </ul>
<b>Sizes</b>	<b>Code</b>
<b>Universal</b>	<b>001000939A</b>
<b>Pack</b>	Carton (8 pcs)



### Super-professional polycarbonate face shield



<b>Safety</b>	<ul style="list-style-type: none"> <li>• EN 166 approved.</li> <li>• Optical class 1, mechanical strength B.</li> </ul>
<b>Materials</b>	<ul style="list-style-type: none"> <li>• PVC structure, polycarbonate face shield, antifogging, adjustable, replaceable.</li> <li>• Foam brow band.</li> </ul>
<b>Sizes</b>	<b>Code</b>
<b>Universal</b>	<b>001000940A</b>
<b>Pack</b>	Carton (8 pcs)



### "Plus" polycarbonate face shield



<b>Safety</b>	<ul style="list-style-type: none"> <li>• EN 166 approved.</li> <li>• Optical class 1, mechanical strength B.</li> </ul>
<b>Materials</b>	<ul style="list-style-type: none"> <li>• PVC structure, polycarbonate face shield, antifogging, adjustable, replaceable.</li> <li>• Foam brow band.</li> </ul>
<b>Sizes</b>	<b>Code</b>
<b>Universal</b>	<b>001000942A</b>
<b>Pack</b>	Carton (8 pcs)



### "Plus" mesh face shield



<b>Safety</b>	<ul style="list-style-type: none"> <li>• EN 1731-F approved.</li> <li>• Optical class 1, mechanical strength B.</li> </ul>
<b>Materials</b>	<ul style="list-style-type: none"> <li>• PVC structure, metal mesh face shield, adjustable, replaceable.</li> <li>• Foam brow band.</li> </ul>
<b>Sizes</b>	<b>Code</b>
<b>Universal</b>	<b>001000941A</b>
<b>Pack</b>	Carton (8 pcs)



Nothing but the best  
consumables to  
keep your machines  
running smoothly.



## Lubricants and sundry accessories



# Lubricants



## Alkilate petrol for 4 stroke engines and Special mixture for 2-stroke engines

**OLEO-Alkilate** is a highly refined petrol specifically formulated for 4-stroke engines. **OLEO-Mix Alkilate** is a mixture for 2-stroke engines made from alkylate petrol and biodegradable\* synthetic oil compliant with API TC, JASO FC and ISO L-EGD standards. This fuel is premixed and hence ready for use.

\* Tested to CEC-L-33-A-93 (80% in 21 days) and OECD 301E (64%).

These fuels contain 10 times less harmful substances than traditional petrol and less than 0.1% benzene and other harmful aromatic hydrocarbons and are therefore less hazardous for health and for the environment. The fuels guarantee: high performance and longer engine life. Extremely pure and stable, the fuels have a long shelf life (up to 4 years in sealed containers with no loss of performance).

**Not available  
on all markets.**

OLEO-Mix Alkilate – 5 l container	<b>3555004</b>
-----------------------------------	----------------

OLEO-Alkilate – 5 l container	<b>3555014</b>
-------------------------------	----------------



## PROSINT 2 special oil for 2-stroke engines

Special synthetic ester-based lubricant, expressly formulated for high-performance 2-stroke engines. Special oil for use at 2% (50:1). Effective lubrication at high temperatures. Low emissions, reduced wear and clean engine. Exceeds API TC, JASO FC and ISO-L-EGD specifications. Its pre-fluidified composition makes preparing the mixture easy. Colour: dark red. Pack: carton 20 pcs x 100 ml or 12 pcs x 1 l or 4 pcs x 5 l.

100 ml bottle	<b>001001361</b>
---------------	------------------

1 l can	<b>001001362</b>
---------	------------------

1 litre bottle with measure	<b>001001407</b>
-----------------------------	------------------

5 l bottle	<b>001001405</b>
------------	------------------

200 l drum	<b>3555016</b>
------------	----------------



## EUROSINT 2 special oil for 2-stroke engines

Special oil with 100% synthetic esters. Used at 2% (50:1), this oil is ideal for the lubrication of competition or high performance two-stroke motors. High-resistance lubricating film and excellent anti-wear characteristics. Particularly indicated for exhaust catalysts by virtue of its low smokiness and ash content. Exceeds API TC, JASO FC and ISO-L-EGD specifications. Colour: dark red. Pack: carton 20 pcs x 100 ml or 12 pcs x 1 l.

100 ml bottle	<b>001001536</b>
---------------	------------------

1 l can	<b>001001535</b>
---------	------------------



# Lubricants

## Special oil for 4-stroke engines - SAE 10 W - 30

Highly refined SAE 10 W - 30 grade mineral oil, specifically formulated and developed for 4-stroke air- and water-cooled engines designed for gardening sector applications. Mineral type engine oil containing a special combination of additives that give excellent detergent/dispersant, antioxidant, anticorrosive, and anti-wear properties. Exceeds API SG/CE, MIL - L - 2104 D, MIL - L - 46152 C specifications. Pack: carton 16 pcs x 600 ml. Minimum order: 1 carton.

600 ml can

001001550



## ECOLUBE biodegradable oil for chains

Biodegradable oil for perfect lubrication of guide bars and chains while ensuring minimum environmental impact. Natural product that does not contain mineral oils, sulphur or phosphorous. High lubricating power, antiwear, high viscosity, oxidation-resistant. Exceeds CEC - L - 33 - A - 93 specifications. Package: carton 12 pcs. x 1 l. or 4 pcs. x 5 l. Minimum order: 1 carton.

1 l can

001001549

5 l can

001001548



## CHAIN LUBE guide bar and chain protector

A compound formulated expressly for the protection of guide bars and chains, based on a balanced blend of oils which are specially resistant to low temperatures. Easily biodegradable. Special additives guarantee appreciable protection against wear and seizure. Good viscosity and pour point. Pack: carton of 12 pcs x 1 l or 4 pieces x 5 l. Minimum order: 1 carton.

1 l can

3555010

5 l can

3555009

20 l drum

3555015

200 l drum

3455013



## POLAR LUBE mineral oil for guide bars and chains

Mineral-based lubricant, high viscosity, extremely adhesive, formulated for lubrication of chain saw guide bars and chains. Ensures excellent stability and pour point at low temperatures, good wear protection and outstanding corrosion resistance. Pack: carton of 12 pcs x 1 l or 4 pieces x 5 l. Minimum order: 1 carton.

1 l can

3555001

5 l can

3555002



## Lubricants



### Special grease

Special high quality lithium grease with molybdenum bisulphide for bevel gear pairs, elastic couplings, hedgetrimmer transmissions, earth auger gear reducers. Recommended for use with all mechanical parts subject to high loads. Exceeds ISO 6743-9; DIN 51825 KPF 2K - 30 specifications.

Special grease/125 g tube. Pack: carton. Quantity per carton: 24. Minimum order: 2 cartons.

Special grease/40 g tube. Pack: counter-top display carton. Quantity per carton: 24. Minimum order: 2 cartons.

Special grease/40 g tube. Pack: carton box. Quantity per carton: 300. Minimum order: 1 carton.

Each equipped with dispenser nozzle and slot for display fixture.

125 g tube	001000677B
Counter-top display carton no. 24/40 g tubes	3555005
Carton box no. 300 /40 g tubes	3555900



### ADDITIX 2000 special additive for petrol and diesel fuels

Special additive, ideal for treatment of diesel fuel, 2-stroke mixture and leaded or unleaded petrol. Prevents deterioration of fuel for at least 12 months and protects from oxidation. Facilitates engine starting, keeps fuel system clean, and protects against rust and corrosion. Pack of 24 x 125 ml bottles. One full doser cap is sufficient for 5 l of petrol.

125 ml bottle	001000972
---------------	-----------



### Multipurpose concentrated degreasing detergent

High concentration detergent to obtain excellent results in the cleaning of heavily fouled surfaces such as mechanical parts, engines, tools for gardening, agriculture, and forestry, bicycles and motorcycles. 500 ml bottle with spray dispenser. Pack containing 12 pcs x 500 ml or 4 pcs x 5 l. Minimum order: 1 carton.

500 ml bottle	001101009A
5-litre can	001101222



## Sundry accessories

### 2-stroke mixture/oil hose

Resistant to UV radiation and deterioration caused by petrol. Pack: loose.

ø 3.2 x 6.4 mm - length 1 m	005100921A
ø 3 x 5 mm - length 1 m	005101079



### Starting rope spools

High-strength diamond braided nylon rope for maximum resistance to strain and fraying. Pack: loose.

ø 2.5 mm - 100 m	3503121
ø 3.0 mm - 100 m	3503015
ø 3.5 mm - 100 m	005101050
ø 4.0 mm - 100 m	006101034



### Fuel/oil can

Fuel/oil can, BAM approved, for transporting in the car; red plastic dual purpose can: 6 l petrol + 3 l oil - professional type with graduated scale. Equipped with STOP-SPOUT for rapid and safe refuelling without spillage. Pack: loose.

Fuel/oil can	3355004
--------------	---------



### Quick fill

Refuelling accessory for use with fuel/oil can product number **4175158 - 3355004**. For quick and safe refuelling without spillages.

Quick fill	4180059R
------------	----------



### Fuel can

BAM approved petrol can for transporting fuel on public highways in accordance with UN regulations. This product is TÜV certified. Comes with extension hose for troublefree refuelling. A high quality jerry can suitable both for professional and for home. Pack: carton.

5 l fuel can	4175169
--------------	---------



## Sundry accessories



### Extension cords to CE - VDE - IMQ standards

Available in various different versions to work easily in the vicinity of the home using electric power tools. 250 V/10 A cable 25 m - 3 x 1 mm<sup>2</sup>. Pack: bag.

With Italian plug and Schuko receptacle

**001000865**

With Schuko plug and receptacle

**001000866**

Schuko receptacle

**3044102**



**cod. 001000865**



**cod. 001000866**



### Funnel

Plastic funnel complete with filter mesh; protects the engine from impurities in the oil. Pack: bag.

Funnel

**003401054R**



### Toolkit

Aluminium case with internal partitions, complete with special tools, instruction booklets and repair manuals. Pack: loose.

Complete toolkit

**3055125A**

**MISTRAL** cutting deck height blocks, recommended for fast and optimal adjustment of the cutting deck in accordance with factory settings.

**68130588**



### Electronic revolution counter

Measurement range from 100 to 30,000 rpm with tolerance of  $\pm 10$  rpm. Ideal for 2-stroke and 4-stroke engines. Functions with cable or remotely through induction. Rev counter and hour counter functions. Pack: pouch.

Electronic revolution counter

**001000785**



## Sundry accessories

### Diagnostic tester

Indispensable for complete diagnostics of the **MISTRAL** garden tractor electrical control system, the tester shows the machine working hours (for adequate scheduled maintenance) and identifies any faults of active safety devices and any alarms present.

Diagnostic tester

3055136A



### Spark tester

Checks arrival of current to spark plug. To be connected between coil cable and spark plug; functions also when the engine is running. Pack: loose.

Spark tester

001000515R



### Compression gauge

For monitoring engine status. This instrument makes it possible to detect anomalies on pistons, rings, valves, gaskets and cylinders.

Compression gauge

001000392B



### Combination wrenches

To remove spark plugs. Also features screwdriver tip for chainsaw chain tensioning. Pack: loose.

19 mm with bar

301000129

17 x 19 mm

2304009

14 x 21 mm

2304022

10 x 19 mm

2304029

13 x 16 mm

2304017

13 x 19 mm

2304073

19 x 21 mm

66060414



## Sundry accessories



### Spark plugs

A comprehensive range of spark plugs, expertly developed for the full range of high performance 2 and 4 stroke engines. A combination of innovative materials and special manufacturing methods will guarantee optimum starting, efficient combustion and lower fuel consumption, prolonging the life of the engine and other moving parts. In addition, the use of high quality oils like **Prosint 2** and **Eurosint 2** ensures that there are fewer unburned residues from combustion, signifying improved performance and less maintenance.



Family	Model	NGK		CHAMPION		ENKER		Quantity
		Code	Model	Code	Model	Code	Model	Pack pcs.
Chain saws	GS 260 - 925 - 936 - 937 - 940 - 941 - 956 - 962 - 970 - 971 - 999	3055114	BPMR6A	3055101	RCJ - 7Y			10
	GS 370 - GS 410 - 947 - 952 - GS 520	3055112	CMR7H					10
	932			50030297R	RCJ-8Y			8
	GS 35 - GS 350	3055114	BPMR6A	3055101	RCJ - 7Y			10
	GS 44 - GS 440 - GST 250 - GST 360	3055120	CMR7A					
	965 HD - 980 - 981 - 985 - GS 936 - GS 650 - GS 720 - GS 820	3055118	BPMR8Y					10
	GS 940	3055113	CMR6A					10
Pruners	PP 250 - PPX 250	3055112	CMR7H	3055104R	RCJ-6Y			10
	PP 270 - PPX 270 - PPX 271	3055120	CMR7A					
Hedge trimmers	HC 260 - HC 275 - HC 27 - HC 265 XP - HC 280 XP - HCS 280 XP	3055112	CMR7H	3055104R	RCJ-6Y			10
	HC 255 - HC 265 XP - HCS 285 XP- BC 280 H - BC 240 H BC 240 HL	3055120	CMR7A					10
Blower	BV 162 - BV 300 - BV 270 - BV 270 BP	3055114	BPMR6A	3055101	RCJ - 7Y			10
	BV 126			3055104R	RCJ-6Y			10
Multimate	Engine unit	3055115	BPMR7A					10
Brushcutters	725			3055104R	RCJ-6Y			10
	BC 430 - BCF 430 - BC 431 - BCF 431	3055118	BPMR8Y					10
	SPARTA 25 - SPARTA 26 - SPARTA 250	3055114	BPMR6A	3055101	RCJ-7Y	3055109	FSC75PR	10 - 12
	BC 280 - BC 320 - BC 270 - BC 300 - BC 300 D	3055120	CMR7A					10
	BC 250 - BC 220 - BC 240	3055112	CMR7H					10
	BC 350 - BC 380 - BC 420 - BCF 420 - 730 - 735 - 740 SPARTA 37 - SPARTA 370 - SPARTA 38 - SPARTA 380 SPARTA 42 - SPARTA 44	3055115	BPMR7A	3055101	RCJ-7Y			10
	746 - 753 - 755 - 435 BP - 440 BP - 446 BP - 453 BP - 741 SPARTA 381 - SPARTA 440 - SPARTA 441 - 441 BP							
Lawnmowers	B&S G - MAX - LUX 53 - LUX 55 TBX - G 48 TBX (4 IN 1)			3055121	RJ19LM			10
	LUX 53 TBVI - LUX 55 TBI			3055122	RC12YC			10
	EMAK K40 - K50 - K55 - K60 - K500 - K600 K700 - K800 - HONDA G - MAX - LUX			3055123	RN9YC			10
Garden tractors	OM 72 C/12,5 K H - OM 84/14,5 K H - OM 91 PLUS/14,5 K M/K H - OM 91 PLUS/14,5 K H - OM 92/16 K H - OM 95/16 K H - OM 98 L/14,5 K H - OM 101 C/16 K H - OM 105/16 K H - OM 106/17,5 K H - MISTRAL 72 K H			3055122	RC12YC			10
Water pumps	SA 18 - SA 30 - SA 45 - SC 33 - C19/20 - WP 300	3055114	BPMR6A	3055101	RCJ-7Y			10
Mistblowers	AM 162	3055114	BPMR6A	3055101	RCJ - 7Y			10
	AM 190 - MB 80 - MB 800	3055112	CMR7H	3055101	RCJ-7Y			10
Sprayers	SP 126			3055104R	RCJ-6Y			10
Wheelbarrow sprayers	SC 150 - SC 180	3055114	BPMR6A	3055101	RCJ-7Y			10
Shakers	OS 250 - OS 250 L			3055104R	RCJ-6Y			10
	OS 550 ERGO	3055115	BPMR7A	3055101	RCJ-7Y			10
Rotary tillers	MH 150 RKS - MH 180 RKS - MH 170 RKS - MH 175 RK - MH 197 RK			3055123	RC9YC			10
Earth augers	MTL 85 R	3055118	BPMR8Y					10
	MTL 40 - MTL 51	3055114	BPMR6A	3055101	RCJ-7Y			10
Transporters	CR 270 K - CR 340 K			3055123	RN9YC			10
Powercutters	963 TT - 983 TT - 980 TTA	3055118	BPMR8Y					10



Always in good hands,  
before, during and after purchase.

## Greater peace of mind and efficiency thanks to technical assistance

**Mowing the lawn, clearing up grass and twigs, trimming hedges or thinning the foliage of trees, watering, pruning,** these are important jobs that need to be done, if gardens or outdoor areas are to look good and stay healthy, but they can also be of value simply as **enjoyable pastimes** for lovers of greenery and life in the open air. Enjoyable, thanks not least to the **high standards** offered by all **Oleo-Mac** machines in terms of **performance, comfort and safety**. A machine must be used correctly and **properly maintained** if it is to retain its original quality, add value to the work of the operator and deliver the expected service life and long-term reliability. Accordingly, the careful observance of a few simple guidelines will ensure you continue to derive maximum satisfaction from your machine.

- Contact **only an Oleo-Mac authorized dealer when making a purchase**: you will be advised as to which is the best machine for your needs, told about correct and safe operating procedures, and instructed how to prepare it for first time use;
- Every machine is accompanied by an **Operator Instruction Book** included in the packaging, which you will receive at the moment of purchase: be sure to read the book carefully before use;
- Have your product **checked over periodically** by an **Oleo-Mac** authorized dealer: this will ensure the machine always stays in tip-top condition and matches up fully to your expectations;
- Always use **original spare parts and accessories**, which your **Oleo-Mac** authorized dealer will be able to supply.

## Advantages offered by Oleo-Mac dealerships

- **Advice on purchase:**  
the **Oleo-Mac** dealer will **advise** you on the **machine** best suited to your needs, and provide all pertinent information on correct use of the product.
- **Specialized technical service:**  
users are ensured **quality repairs**, carried out as quickly as is practically possible. Products for home use are guaranteed two years.
- **After-sales service:**  
all **Oleo-Mac** dealers are skilled operators who regularly attend **refresher and specialization courses** enabling them to offer the customer clear and comprehensive information, always in line with developments in the sector.
- **Original parts and accessories:**  
repairs or replacements of components are carried out using only **Oleo-Mac** original spare parts and accessories. A guarantee that machines will maintain their performance undiminished over time.



---

Data and illustrations published in the catalogue are not binding where specifications of materials are concerned, given that these will always be subject to technical improvement. Technical specifications given in the catalogue are subject to change without notice, as also are directions relating to general use of the equipment.

Certain items are not available in all countries, or are available only on request.





Subject to modifications. Some models one available for certain markets only. - Mod. 001101984A - 2017



It's an **Emak S.p.A.** trademark  
42011 Bagnolo in Piano (RE) Italy  
[www.myoleomac.com](http://www.myoleomac.com)  
YouTube [www.youtube.com/MyOleoMac](https://www.youtube.com/MyOleoMac)

