



It's an Emak S.p.A. trademark
42011 Bagnolo in Piano (RE) Italy
Tel. +39 0522 956611 • Fax +39 0522 951555
info@myoleomac.com • www.myoleomac.com
YouTube www.youtube.com/MyOleoMac

001102024

NEW CHAINSAW GST 250



PERFORMANCE
DESIGN
COMFORT




PERFORMANCE



HIGH CUTTING TORQUE

DESIGN

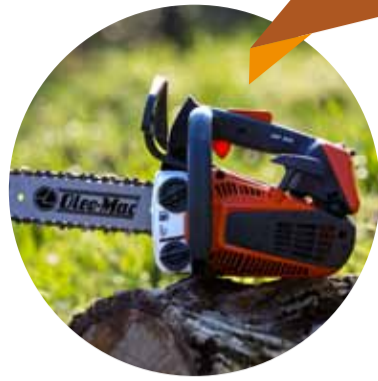

NEW, MORE ERGONOMIC DESIGN



COMFORT



LIGHTWEIGHT AND BALANCED, ALWAYS

NYLON AIR FILTER
Large size filter element for more efficient air intake and reduced maintenance times

ON-BOARD CLUTCH
Quick fitting of bar and chain, cleaner clutch for lasting performance

SNAP HOOK
Fold away steel snap hook designed for rapid attachment of the tool to the operator's harness

ALUMINIUM OILER
Optimal lubrication of bar and chain, even in tough working conditions

TRANSLUCENT TANKS
Oil and fuel levels can be monitored easily thus reducing unscheduled stops for top-ups

"EASY ON" FACILITATED STARTING
Reduces the compression effect of the professional engine for effortless starts

PROFESSIONAL ENGINE

- Light alloy crankcase
- Nickel plated cylinder
- Two-ring piston
- Two-part forged crankshaft

CLEAN CUTS IN ALL CONDITIONS
Acceleration and torque when needed for high cutting quality and minimum operator fatigue

"ALWAYS-ON" SWITCH
Fast stopping and always ready to restart thanks to the spring return function

AIR PURGE
Assists cold starts and starting after refuelling

TECHNICAL SPECIFICATIONS

POWER/DISPLACEMENT	1.3 HP - 1.0 kW/25.4 cm ³
BAR LENGTH (nose)	25 cm/10" (sprocket/carving tip)
CHAIN (pitch x gauge)	3/8" x .050" (sprocket) 1/4" x .050" (sprocket) 1/4" x .050" (carving tip)
CHAIN TENSION ADJUSTER	lateral
OILER	aluminium, automatic /zero flow rate at idle speed
OIL RESERVOIR / FUEL TANK CAPACITY	0.16 l/0.23 l
TANK FILLER NECK	Ø 28 (fuel) / Ø 24 (oil)
CLUTCH	On-Board
ON-OFF SYSTEM	Always-On
DRY WEIGHT WITHOUT BAR AND CHAIN	2.7 Kg

PROTECTIVE CLOTHING



For sound advice, just ask our authorized dealer.